

Rockchip RK2118M Datasheet

**Revision 1.2
Nov. 2024**

Revision History

Date	Revision	Description
2024-11-27	1.2	Add Chapter 4 Timing Specification to describe the timing specification of interfaces; Update the Max. voltage values for DSP and logic core in 3.1 and 3.2
2024-05-31	1.1	Update some description and parameters
2024-04-28	1.0	Initial release

Rockchip Confidential

Table of Content

Table of Content	3
Figure Index	4
Table Index.....	5
Warranty Disclaimer.....	6
Chapter 1 Introduction	7
1.1 Overview	7
1.2 Features	7
1.3 Block Diagram	12
Chapter 2 Package Information.....	14
2.1 Order Information	14
2.2 Top Marking	14
2.3 Package Dimension	14
2.4 MSL Information	15
2.5 Lead Finish/Ball material Information	16
2.6 Pin Number List	16
2.7 Power/Ground IO Description	17
2.8 Function IO Description.....	19
2.9 IO Pin Name Description	22
2.10 Rockchip Matrix IO Function List	26
2.11 FLEXBUS Interface Typical Application Example.....	27
Chapter 3 Electrical Specification	30
3.1 Absolute Ratings	30
3.2 Recommended Operating Condition	30
3.3 DC Characteristics	31
3.4 Electrical Characteristics for General IO	31
3.5 Electrical Characteristics for PLL	32
3.6 Electrical Characteristics for USB2.0 Interface	32
3.7 Electrical Characteristics for SARADC	33
3.8 Electrical Characteristics for TSADC.....	33
Chapter 4 Timing Specification	34
4.1 FSPI Interface	34
4.2 eMMC Interface.....	34
4.3 SDMMC Interface	36
4.4 PDM Interface.....	36
4.5 SAI Interface.....	37
4.6 RMII Interface	38
4.7 SPI Interface	39
4.8 SPI2APB(SPI0) Interface	40
4.9 Flexbus interface.....	41
Chapter 5 Thermal Management	43
5.1 Overview	43
5.2 Package Thermal Characteristics	43

Figure Index

Fig.1-1 RK2118M Block Diagram	13
Fig.2-1 RK2118M Package Definition	14
Fig.2-2 RK2118M Package Top View	14
Fig.2-3 RK2118M Package Side View	15
Fig.2-4 RK2118M Package Dimension	15
Fig.4-1 FSPI Interface Timing	34
Fig.4-2 eMMC output mode timing	34
Fig.4-3 eMMC input mode timing	35
Fig.4-4 SDMMC output mode timing	36
Fig.4-5 SDMMC input mode timing	36
Fig.4-6 PDM interface timing	36
Fig.4-7 SAI interface master mode timing	37
Fig.4-8 SAI interface Slave mode timing	37
Fig.4-9 RMII interface timing	38
Fig.4-10 MDIO interface timing	39
Fig.4-11 SPI interface master mode timing	39
Fig.4-12 SPI interface slave mode timing	39
Fig.4-13 SPI2APB interface slave mode timing	40
Fig.4-14 Flexbus interface master mode timing	41
Fig.4-15 Flexbus interface slave mode timing	41

Table Index

Table 2-1 RK2118M Pin Number Order Information.....	16
Table 2-2 RK2118M Power/Ground IO Information.....	17
Table 2-3 RK2118M Function IO Description	19
Table 2-4 IO Function Description List.....	22
Table 2-5 RK2118M Rockchip Matrix IO Function List	26
Table 2-6 RK2118M Pin Mapping between FLEXBUS and ADC	27
Table 2-7 RK2118M Pin Mapping between FLEXBUS and DAC	28
Table 2-8 RK2118M Pin Mapping between FLEXBUS and DVP Camera	28
Table 2-9 RK2118M Pin Mapping between FLEXBUS and QSPI LCD Panel.....	29
Table 3-1 Absolute Ratings.....	30
Table 3-2 Recommended Operating Conditions.....	30
Table 3-3 DC Characteristics.....	31
Table 3-4 Electrical Characteristics for Digital General IO	31
Table 3-5 Electrical Characteristics for FRAC PLL.....	32
Table 3-6 Electrical Characteristics for USB2.0 Interface	32
Table 3-7 Electrical Characteristics for SARADC	33
Table 3-8 Electrical Characteristics for TSADC	33
Table 4-1 SAI interface master mode timing	37
Table 4-2 SAI interface slave mode timing.....	38
Table 4-3 SPI interface master mode timing	39
Table 4-4 SPI interface slave mode timing	40
Table 4-5 Flexbus interface master mode timing.....	41
Table 4-6 Flexbus interface slave mode timing	41
Table 5-1 RK2118M Thermal Resistance Characteristics.....	43

Warranty Disclaimer

Copyright © 2024 Rockchip Electronics Co., Ltd. All rights reserved.

No part of this document may be reproduced, transmitted or used in any form or by any means without the written prior consent of Rockchip Electronics Co., Ltd.

Trademark

Rockchip is a registered trademark of Rockchip Electronics Co., Ltd. in the People's Republic of China and other countries/areas. Other brands, product names mentioned in this document are the property of their respective owners.

Disclaimer

Rockchip Electronics Co., Ltd. ("Rockchip") may make changes to any information in this document at any time without any prior notice.

Information in this document is provided just as a reference or typical applications. All or part of product features described in this document may not be within the purchase scope or the usage scope, and may be subject to the third party licensing requirements. All statements, information in this document is provided "AS IS" without warranties of any kind, either express or implied. Actual performance of Rockchip products may vary in different applications. Third party licenses maybe required to use some features supported by Rockchip products. Customers shall be solely and exclusively responsible to obtain all appropriately required third party licenses prior to its such use. Should customers use the features supported by Rockchip products without any required third party license, customers shall indemnify and hold Rockchip and its subsidiaries, affiliates as well as distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of any claim associated with such unauthorized use.

Rockchip products are not intended for use in military, airplane, medical devices, lifesaving or life sustaining applications ("Unintended Uses"). Customers shall take any and all actions to ensure using Rockchip products in a lawful manner and shall be liable for Unintended Uses.

Chapter 1 Introduction

1.1 Overview

RK2118M is a high-performance triple-core HiFi4 DSP processor designed for intelligent voice interaction, audio input/output processing and other digital multimedia applications. Embedded FIR/IIR accelerator and asynchronous sample rate converter hardware engine for minimizing DSP overhead to meet audio processing requirements. Also one NPU, specially designed for audio is integrated for potential audio AI processing.

RK2118M integrates dual-core STAR processor to run operating system, UI rendering and application protocol stack, and so on. Embedded 1024KB system memory and eXecute In Place (XIP) Flash interface make RK2118M flexible for different application development.

RK2118M integrates rich peripheral interfaces, such as VOP, SAI, PDM, SPDIF, USB2 OTG, RMII, CAN and so on, It can meet different needs of application development, reduce hardware development complexity and development cost.

1.2 Features

1.2.1 Microprocessor

- Dual core Star-SE processor, ARM-V8M Architecture
- Support Thumb-2 technology
- Nested Vectored Interrupt Controller (NVIC) closely integrated with the processor
- Support single-precision Floating Point Unit
- Support Enhanced Memory Protection Unit
- Support TrustZone technology
- 16KB I-Cache and 16KB D-Cache
- Serial wire debug port (SW-DP) debug access

1.2.2 DSP

- Three core HiFi4 DSP processor (DSP0, DSP1, DSP2)
- Dual Load/Store, 4 VLIW Slots, 64-bit SIMD
- 4 MAC 32x32, 4 MAC 24x24, 8 MAC 32x16, 8 MAC 16x16 per cycle
- Two 2-Way SIMD VFPU
- 256KB ITCM, 768KB DTCM, 64KB I-Cache, 64KB D-Cache for DSP0
- 64KB ITCM, 256KB DTCM, 64KB I-Cache, 64KB D-Cache for DSP1/DSP2
- One isolated voltage domain for DSP0 DVFS

1.2.3 Neural Process Unit

- Support float point 16bit convolution operation
- 32 float point 16bit MAC operations per cycle
- 80KB internal buffer
- Inference Engine: TensorFlow, Caffe, Tflite, Pytorch, Onnx NN, Android NN, etc.

1.2.4 FIR/IIR Accelerator

- Support simultaneous operation of FIR and IIR
- Support TCB chain structure
- Support legacy mode and max up to 32 TCB
- Support auto configuration mode (ACM), and keep working until TCB pointer is empty
- Support 4096 order FIR filter
- Support Transposed Direct Form II Biquads for IIR, and max 64 biquads cascade

1.2.5 Memory Organization

- Internal on-chip memory
 - BootROM
 - System SRAM

- PMU SRAM
- External off-chip memory
 - SPI Nor/Nand Flash
 - eMMC
 - SD Card

1.2.6 Internal Memory

- Internal BootRom
 - Support system boot from the following device:
 - ◆ SPI Flash interface
 - ◆ eMMC interface
 - ◆ SDMMC interface
 - Support system code download by the following interface:
 - ◆ USB OTG interface (Device mode)
 - ◆ SPI interface (Slave mode)
 - ◆ UART interface
- Internal SRAM
 - 1024KB System SRAM
 - 16KB PMU SRAM

1.2.7 External Memory or Storage device

- Serial Flash Interface
 - Support transfer data from/to SPI flash device
 - Support x1, x2, x4, x8 data bits mode
 - Support SDR, DDR mode
 - Support XIP (eXecute In Place)
 - Support up to 1 chip select
- eMMC Interface
 - Compatible with standard iNAND interface
 - Compatible with eMMC specification 4.51
 - Data bus width is 8bits
- SD/MMC Interface
 - Compatible with SD3.0, MMC ver4.51
 - Compatible with SDIO3.0 protocol
 - Data bus width is 4bits

1.2.8 System Component

- CRU (clock & reset unit)
 - One oscillator with external crystal input
 - One internal low frequency RC clock
 - One internal power on reset circuit
 - Support single-end 32.768KHz clock input/output from/to GPIO
 - Support PLL control and generate various clock frequency for chip
 - Support clock gating control for individual components
 - Support global soft-reset control for whole chip, also individual soft-reset for each component
- PMU (power management unit)
 - Three separate digital voltage domains (DSP0_DVDD/CORE_DVDD/PMU_DVDD)
 - Multiple configurable work sleep modes to save power consumption by different frequency or automatic clock gating control or external power on/off control
- Timer

- Twenty 64bits timers with interrupt-based operation
- One 64bits timer for low power mode application
- Support two operation modes: free-running and user-defined count
- Support timer work state checkable
- PWM
 - 8-channels PWM with interrupt-based operation
 - Support capture mode
 - Provides reference mode and output various duty-cycle waveform
 - Support continuous mode or one-shot mode
 - Support one channel IR TX and one channel IR RX application
 - Support one clock frequency calculation engine and one clock free running counter
 - Support four channel waveform generation through lookup table
- Watchdog
 - Support five 32-bit watchdog counter
 - Counter counts down from a preset value to 0 to indicate the occurrence of a timeout
 - WDT can perform two types of operations when timeout occurs:
 - ◆ Generate a system reset
 - ◆ First generate an interrupt and if this is not cleared by the service routine by the time a second timeout occurs then generate a system reset
 - Programmable reset pulse length
 - Totally 16 defined ranges of main timeout period
- Mailbox
 - One Mailbox to service different core's communication
 - Support sixteen mailbox elements, each element includes one data word, one command word register and one flag bit that can represent one interrupt
- Spinlock
 - Support spinlock registers for software to realize resource management
- DMA
 - Support five embedded DMA controllers
 - Support data transfer types with memory-to-memory, memory-to-peripheral, peripheral-to-memory
 - Support TrustZone technology and programmable secure state for each DMA channel
 - Support 8 channels for each DMA controller
- Secure System
 - Cipher engine
 - ◆ Support SHA-1, SHA-256/224, MD5 with hardware padding
 - ◆ Support HMAC of SHA-1, SHA-256, MD5 with hardware padding
 - ◆ Support AES-128, AES-192, AES-256 encrypt & decrypt cipher
 - ◆ Support AES ECB/CBC/OFB/CFB/CTR/CTS/XTS/CCM/GCM/CBC-MAC/CMAC mode
 - ◆ Support up to 4096 bits PKA mathematical operations for RSA
 - Support two 256 bits RNG output
 - Support secure boot
 - Support secure debug
 - Support secure OTP
 - Support secure OS
 - Support bus firewall

1.2.9 Video Output Processor

- Support RGB888/RGB565 source data format
- Support RGB888/RGB565/RGB666 display data format
- Support i8080 MCU serial interface
- Support max output resolution 480x480

1.2.10 Audio Interface

- SAI
 - Support eight SAI components
 - Support audio protocol: I2S, PCM, TDM
 - Support up to 128 slots available with configurable size
 - Support slot length 8 to 32 bits configurable
 - Support slot valid data length 8 to 32 bits configurable
 - SAI0/SAI4 support up to four lane transmitter and four lane parallel receiver
 - SAI1/2/3/5/6/7 support up to two lane transmitter and two lane receiver
 - Support combine different SAI component to meet more transmitter and receiver lane
- PDM
 - Support PDM master receive mode
 - Support 5 wire PDM interface with one is clock and 4 data line
 - Support up to 8 mono microphones
 - Support 16~24 bits sample resolution
- SPDIF
 - Support SPDIF TX x 1
 - Support SPDIF RX x 2
 - Support 16bits/20bits/24bits resolution
 - Support linear PCM mode (IEC-60958)
 - Support non-linear PCM transfer (IEC-61937)
- ASRC
 - Support eight ASRC components
 - Support fixed length conversion mode and real time conversion mode
 - Support asynchronous sample rate clock for real time conversion mode
 - ASRC0/ASRC4 support 8 channel sample rate converter
 - ASRC1/2/3/5/6/7 support 4 channel sample rate converter
 - Support combine different ASRC component to meet more channel sample rate converter

1.2.11 Connectivity

- RMII 10/100 Ethernet Controller
 - Support one Ethernet Controller
 - Supports 10/100-Mbps data transfer rates with the RMII interfaces
 - Supports both full-duplex and half-duplex operation
- USB 2.0 OTG
 - Support one USB 2.0 OTG port
 - Compatible with USB 2.0 specification
 - Supports high-speed (480Mbps), full-speed (12Mbps) and low-speed (1.5Mbps) mode
- FLEXBUS interface
 - Support transfer data from internal memory to GPIO by DMA
 - Support transfer data from GPIO to internal memory by DMA
 - Support multiple operating modes
 - ◆ Multiplexing TX clock and RX clock, Multiplexing TX data and RX data

- Support TX only mode, RX only mode, TX then RX mode
- ◆ Multiplexing TX clock and RX clock, Separating TX data and RX data
 - Support TX only mode, RX only mode, TX and RX mode, TX then RX mode
- ◆ Separating TX clock and RX clock, Separating TX data and RX data
 - Support TX only mode, RX only mode, TX and RX mode
- Support clock free running mode and following data mode
- Support TX data width 1, 2, 4, 8, 16 bit configurable
- Support RX data width 1, 2, 4, 8, 16 bit configurable
- Support continue transmission mode and fix length transmission mode
- Support one chip selection function for multiplexing TX clock and RX clock mode
- Support two chip selection function for separating TX clock and RX clock mode, one for TX direction, the other for RX direction
- Support TX clock auto gating
- Support DVP (RGB888, RGB565, YUV422) interface for camera sensor
- SPI interface
 - Support three SPI Controllers
 - SPI0 support serial-slave mode
 - SPI1/SPI2 support serial-master and serial-slave mode, software-configurable
- I2C interface
 - Support six I2C interface
 - Support 7bits and 10bits address mode
 - Software programmable clock frequency
 - Data on the I2C-bus can be transferred at rates of up to 100 Kbit/s in the Standard-mode, up to 400 Kbit/s in the Fast-mode or up to 1 Mbit/s in Fast-mode Plus
- UART Controller
 - Support four UART interface
 - Embedded two 64-byte FIFO for TX and RX operation respectively
 - Support 5bit, 6bit, 7bit, 8bit serial data transmit or receive
 - Standard asynchronous communication bits such as start, stop and parity
 - Support different input clock for UART operation to get up to 4Mbps baud rate
 - Support auto flow control mode
- CAN Controller
 - Support one CAN interface
 - Support CAN 2.0B protocol
 - Support transmit or receive standard frame
 - Support transmit or receive extended frame
- Touch Key Controller
 - Support multi-channel CapSense monitor
 - Support trigger interrupt waterline configurable
 - Support LPF and DC elimination

1.2.12 Others

- Multiple groups of GPIO
 - All of GPIOs can be used to generate interrupt
 - Support level trigger and edge trigger interrupt
 - Support configurable polarity of level trigger interrupt
 - Support configurable rising edge, falling edge and both edge trigger interrupt
 - Support configurable pull direction (pullup or pulldown)
 - Support configurable drive strength
 - Support configurable slew rate

- Temperature Sensor (TS-ADC)
 - Up to 50KS/s sampling rate
 - Support one temperature sensor
 - -40~125°C temperature range and +/-5°C temperature accuracy
- Successive Approximation ADC (SARADC)
 - 10-bit resolution
 - Up to 1MS/s sampling rate
 - 4 single-ended input channels
 - GPIO multiplexed
- OTP
 - Support 8K bits Size, 7K bit for secure application
 - Support Program/Read/Idle mode
- Package Type
 - QFP128L(body: 14mm x 14mm; lead pitch: 0.4mm)

1.3 Block Diagram

The following figure shows the basic block diagram.

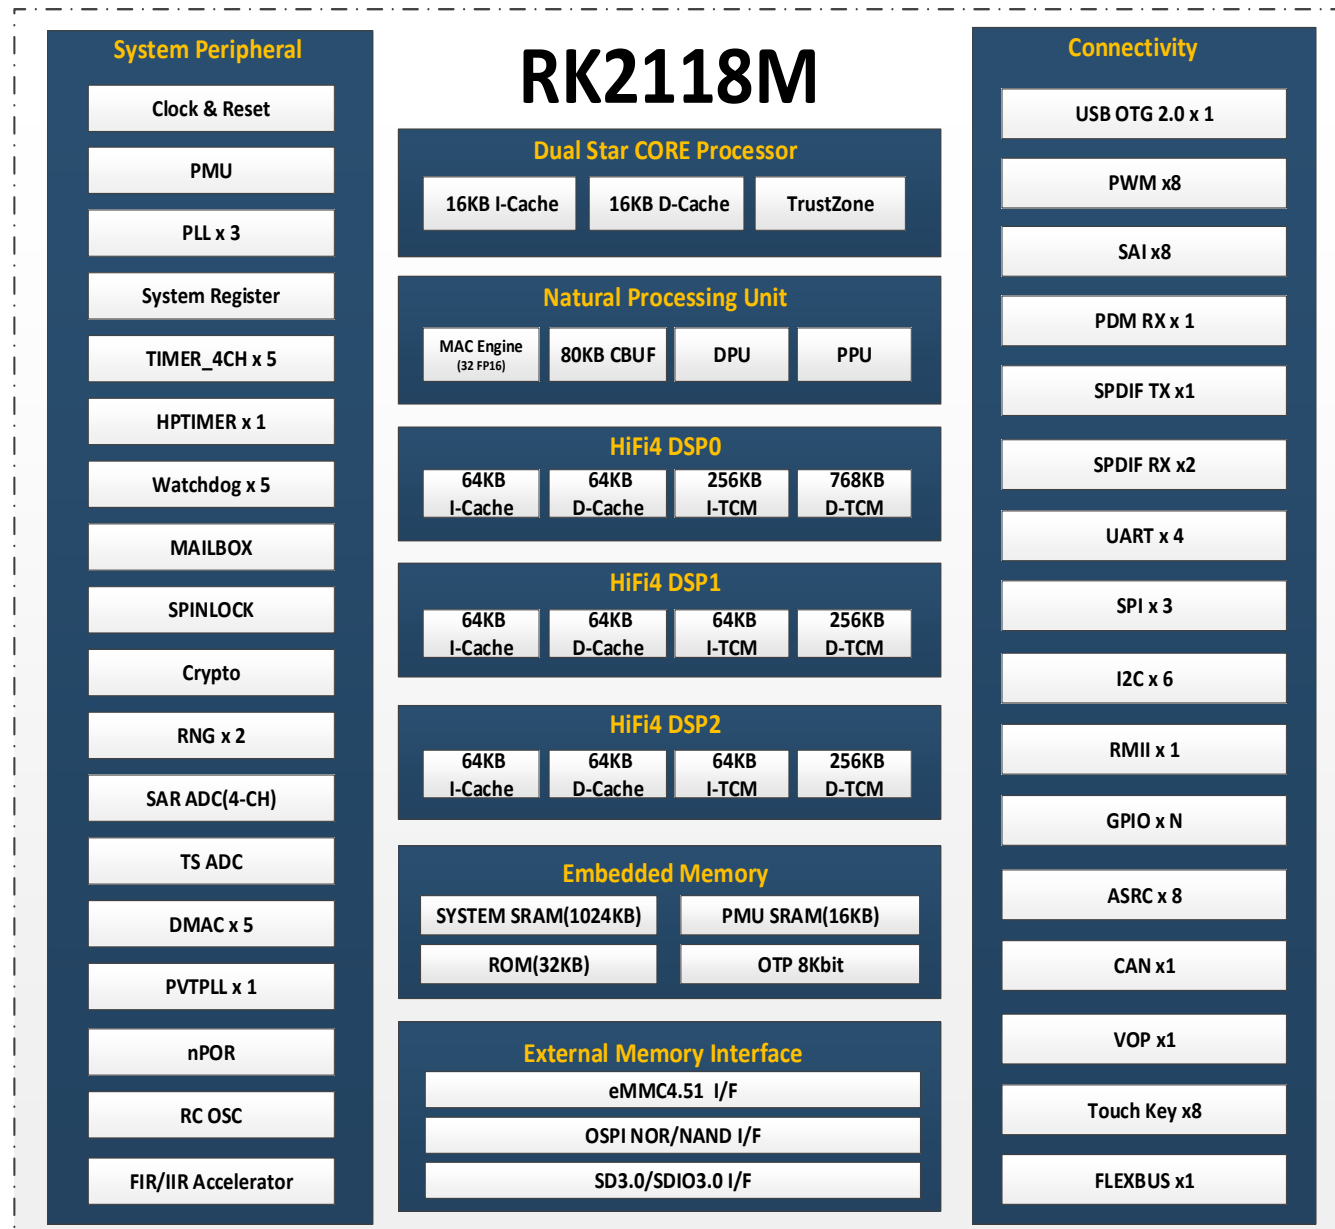


Fig.1-1 RK2118M Block Diagram

Chapter 2 Package Information

2.1 Order Information

Orderable Device	RoHS status	Package	Package Qty	Device Feature
RK2118M	RoHS	QFP128L	900pcs	Smart audio processor

2.2 Top Marking

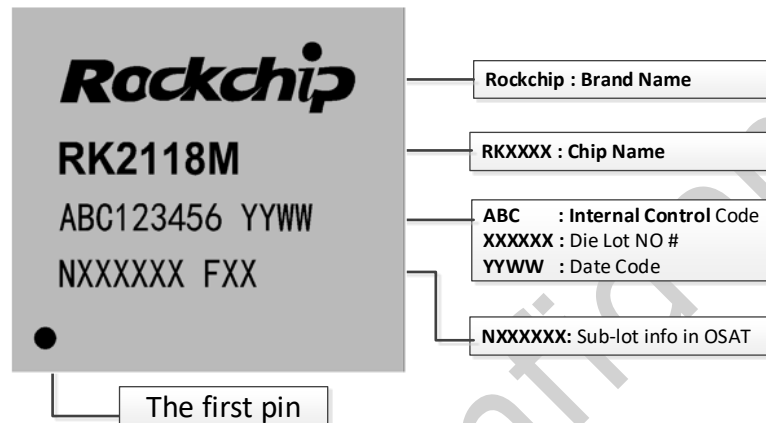


Fig.2-1 RK2118M Package Definition

2.3 Package Dimension


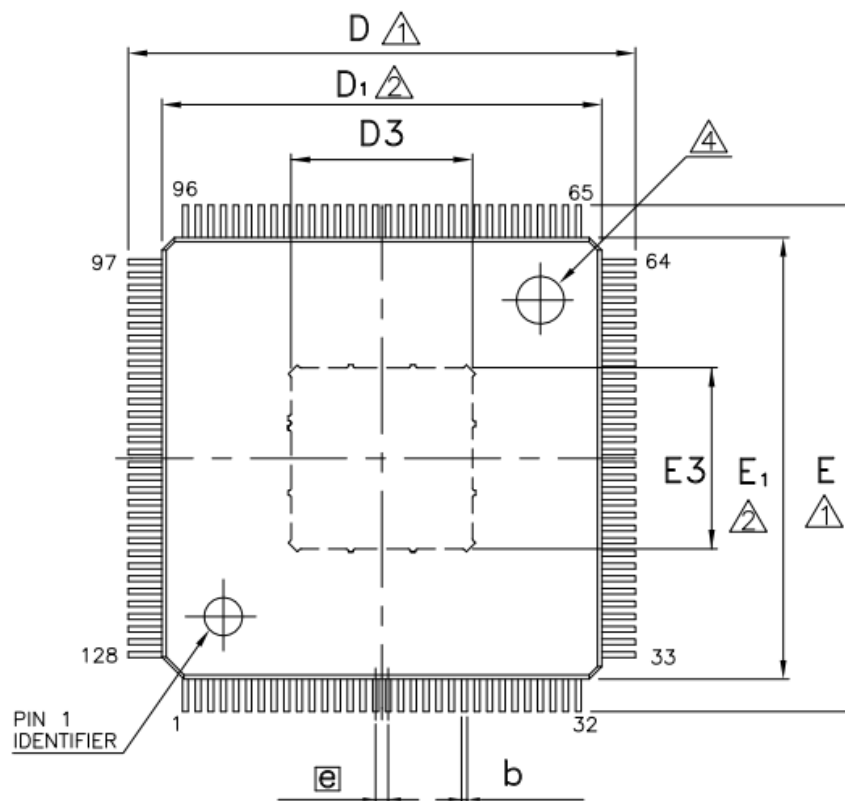


Fig.2-2 RK2118M Package Top View

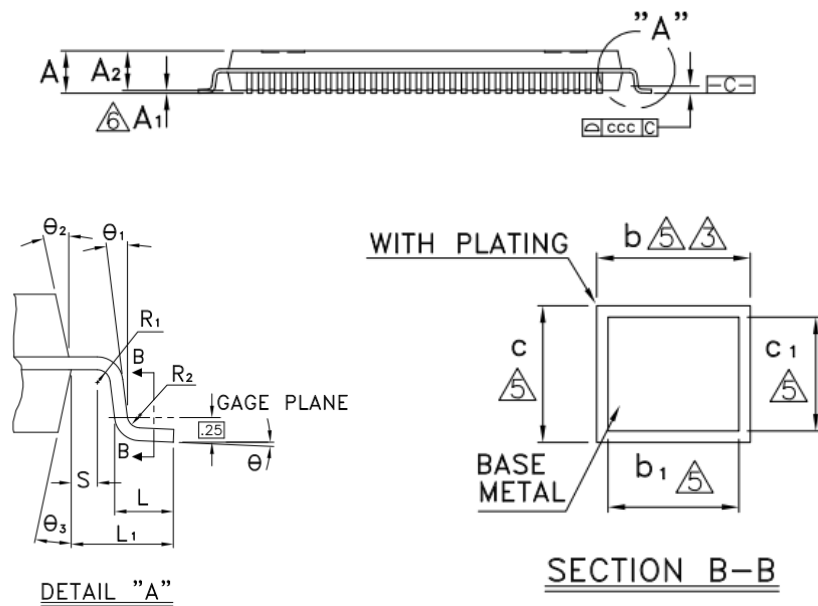

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	—	—	1.60	—	—	0.063
A ₁	0.025	—	0.127	0.001	—	0.005
A ₂	1.35	1.40	1.45	0.053	0.055	0.057
b	0.13	0.18	0.23	0.005	0.007	0.009
b ₁	0.13	0.16	0.19	0.005	0.006	0.007
c	0.09	0.14	0.20	0.004	0.006	0.008
c ₁	0.09	0.12	0.16	0.004	0.005	0.006
D	15.85	16.00	16.15	0.624	0.630	0.636
D ₁	13.90	14.00	14.10	0.547	0.551	0.555
E	15.85	16.00	16.15	0.624	0.630	0.636
E ₁	13.90	14.00	14.10	0.547	0.551	0.555
⌀	0.40 BSC			0.016 BSC		
L	0.45	0.60	0.75	0.018	0.024	0.030
L ₁	1.00 REF			0.039 REF		
R ₁	0.08	—	—	0.003	—	—
R ₂	0.08	—	—	0.003	—	—
S	0.20	—	—	0.008	—	—
θ	0°	3.5°	7°	0°	3.5°	7°
θ ₁	0°	—	—	0°	—	—
θ ₂	11°	12°	13°	11°	12°	13°
θ ₃	11°	12°	13°	11°	12°	13°
ccc	0.08			0.003		

Exposed Pad Size		
L/F	Dimension in mm	Dimension in inch
D3/E3	5.72 REF	0.225 REF

Fig.2-4 RK2118M Package Dimension

2.4 MSL Information

Moisture sensitivity Level: 3

2.5 Lead Finish/Ball material Information

Lead Finish/Ball material: Sn

2.6 Pin Number List

Table 2-1 RK2118M Pin Number Order Information

Pin	Pin Name	Pin	Pin Name
1	RM3_IO15/GPIO4_B7_D	65	FLEXBUS1_D9/FLEXBUS1_CSN_M0/RM1_IO18/GPIO3_C2_D
2	TSADC_AVDD1V8	66	FLEXBUS1_D8/FLEXBUS0_CSN_M0/RM1_IO19/GPIO3_C3_D
3	DSP0_DVDD	67	FLEXBUS1_D7/RM1_IO20/GPIO3_C4_D
4	VSS	68	FLEXBUS1_D6/RM1_IO21/GPIO3_C5_D
5	DSP0_DVDD	69	SDMMC_D1/FLEXBUS1_D5/TEST_CLK_OUT/JTAG_MCU_SWO_M0/RM1_IO22/GPIO3_C6_D
6	UART2_TX_RM/RM4_IO0/GPIO4_C0_D	70	SDMMC_D0/FLEXBUS1_D4/RM1_IO23/GPIO3_C7_D
7	UART2_RX_RM/RM4_IO1/GPIO4_C1_D	71	SDMMC_CLK/FLEXBUS1_D3/RM1_IO24/GPIO3_D0_D
8	UART2_CTSN_RM/RM4_IO2/GPIO4_C2_D	72	SDMMC_CMD/FLEXBUS1_D2/RM1_IO25/GPIO3_D1_D
9	UART2_RTSN_RM/RM4_IO3/GPIO4_C3_D	73	SDMMC_D3/FLEXBUS1_D1/JTAG_MCU_TMS_M0/RM1_IO26/GPIO3_D2_D
10	PWM1_CH0_RM/RM4_IO4/GPIO4_C4_D	74	SDMMC_D2/FLEXBUS1_D0/JTAG_MCU_TCK_M0/RM1_IO27/GPIO3_D3_D
11	PWM1_CH1_RM/RM4_IO5/GPIO4_C5_D	75	VCCIO3_VCC
12	PWM1_CH2_RM/RM4_IO6/GPIO4_C6_D	76	CORE_DVDD
13	PWM1_CH3_RM/TOUCH_KEY_DRIVE_RM/RM4_IO7/GPIO4_C7_D	77	USB2_OTG_AVDD1V8
14	CORE_DVDD	78	USB2_OTG_DM
15	VCCIO5_VCC	79	USB2_OTG_DP
16	CORE_DVDD	80	USB2_OTG_AVDD3V3
17	UART3_TX_RM/TOUCH_KEY_IN0_RM/RM4_IO8/GPIO4_D0_D	81	SARADC_IN0_BOOT/GPIO2_B1_Z
18	UART3_RX_RM/TOUCH_KEY_IN1_RM/RM4_IO9/GPIO4_D1_D	82	SARADC_IN1/GPIO2_B2_Z
19	I2C3_SCL_RM/UART3_CTSN_RM/TOUCH_KEY_IN2_RM/RM4_IO10/GPIO4_D2_D	83	SARADC_IN2/GPIO2_B3_Z
20	I2C3_SDA_RM/UART3_RTSN_RM/TOUCH_KEY_IN3_RM/RM4_IO11/GPIO4_D3_D	84	SARADC_IN3/GPIO2_B4_Z
21	I2C4_SCL_RM/TOUCH_KEY_IN4_RM/RM4_IO12/GPIO4_D4_D	85	AVDD_1V8
22	I2C4_SDA_RM/TOUCH_KEY_IN5_RM/RM4_IO13/GPIO4_D5_D	86	EMMC_D5/FSPI_D5/SPI0_CLK_M1/GPIO1_A0_U
23	I2C5_SCL_RM/TOUCH_KEY_IN6_RM/RM4_IO14/GPIO4_D6_D	87	EMMC_D3/FSPI_D7/SPI0_CSN_M1/GPIO1_A1_U
24	I2C5_SDA_RM/TOUCH_KEY_IN7_RM/RM4_IO15/GPIO4_D7_D	88	EMMC_D4/FSPI_D6/SPI0_MOSI_M1/GPIO1_A2_U
25	NPOR	89	EMMC_D0/FSPI_D4/SPI0_MISO_M1/GPIO1_A3_U
26	TSADC_CTRL/RM0_IO0/GPIO0_A0_Z	90	EMMC_D1/FSPI_D3/GPIO1_A4_U
27	AUPLL_CLK_IN/RM0_IO1/GPIO0_A1_D	91	FSPI_CLK/GPIO1_A5_D
28	ETH_CLK_25M_OUT/RM0_IO2/GPIO0_A2_D	92	EMMC_D2/FSPI_D0/GPIO1_A6_U
29	REF_CLK1_OUT/DSP_AV5/RM0_IO3/GPIO0_A3_D	93	CORE_DVDD
30	CLK_32K/RM0_IO4/GPIO0_A4_D	94	EMMC_D7/FSPI_D2/GPIO1_A7_U
31	PMU_DVDD0V9	95	EMMC_D6/FSPI_D1/GPIO1_B0_U
32	PMUIO_VCC3V3	96	VCCIO1_VCC
33	PWR_CTRL0/RM0_IO5/GPIO0_A5_D	97	VCCIO1_VCC

Pin	Pin Name	Pin	Pin Name
34	PWR_CTRL1/RM0_IO6/GPIO0_A6_U	98	EMMC_CMD/FSPI_CSN/GPIO1_B1_U
35	PWR_CTRL2/RM0_IO7/GPIO0_A7_U	99	FSPI_RSTN/GPIO1_B2_D
36	PWR_CTRL3/JTAG_MCU_SWO_M1/RM0_IO8/GPIO0_B0_D	100	EMMC_CLK/FSPI_DQS/GPIO1_B3_D
37	UART0_TX/JTAG_MCU_TCK_M1/RM0_IO9/GPIO0_B1_U	101	ETH_RMII_CRSDV/SPI0_CLK_M0/RM2_IO0/GPIO2_A0_D
38	UART0_RX/JTAG_MCU_TMS_M1/RM0_IO10/GPIO0_B2_U	102	ETH_RMII_MDIO/SPI0_CSN_M0/RM2_IO1/GPIO2_A1_D
39	SYS_PLL_AVDD1V8	103	ETH_RMII_MDC/SPI0_MOSI_M0/RM2_IO2/GPIO2_A2_D
40	OSC_XIN	104	ETH_RMII_TXEN/SPI0_MISO_M0/RM2_IO3/GPIO2_A3_D
41	OSC_XOUT	105	ETH_RMII_TXD1/JTAG_DSP_TDO/RM2_IO4/GPIO2_A4_D
42	SYS_PLL_AVDD0V9	106	ETH_RMII_TXD0/JTAG_DSP_TCK/RM2_IO5/GPIO2_A5_D
43	OSC_CLK_OUT/REF_CLK0_OUT/GPIO0_B3_D	107	ETH_RMII_CLK/JTAG_DSP_TMS/RM2_IO6/GPIO2_A6_D
44	FLEXBUS0_D0/VO_LCDC_CSN/RM1_IO0/GPIO3_A0_D	108	CORE_DVDD
45	FLEXBUS0_D1/VO_LCDC_RS/RM1_IO1/GPIO3_A1_D	109	ETH_RMII_RXD1/JTAG_DSP_TDI/RM2_IO7/GPIO2_A7_D
46	FLEXBUS0_D2/VO_LCDC_WRN/RM1_IO2/GPIO3_A2_D	110	ETH_RMII_RXD0/JTAG_DSP_TRSTN/RM2_IO8/GPIO2_B0_D
47	FLEXBUS0_D3/VO_LCDC_D0/RM1_IO3/GPIO3_A3_D	111	VCCIO2_VCC
48	FLEXBUS0_D4/VO_LCDC_D1/RM1_IO4/GPIO3_A4_D	112	CORE_DVDD
49	FLEXBUS0_D5/VO_LCDC_D2/RM1_IO5/GPIO3_A5_D	113	VO_LCDC_RDN_M1/RM3_IO0/GPIO4_A0_D
50	FLEXBUS0_D6/VO_LCDC_D3/RM1_IO6/GPIO3_A6_D	114	I2C0_SCL_RM/ETH_PPSCCLK_RM/RM3_IO1/GPIO4_A1_D
51	FLEXBUS0_D7/VO_LCDC_D4/RM1_IO7/GPIO3_A7_D	115	VCCIO4_VCC
52	CORE_DVDD	116	I2C0_SDA_RM/ETH_PPSTRIG_RM/RM3_IO2/GPIO4_A2_D
53	VCCIO3_VCC	117	I2C1_SCL_RM/RM3_IO3/GPIO4_A3_D
54	CORE_DVDD	118	I2C1_SDA_RM/RM3_IO4/GPIO4_A4_D
55	FLEXBUS0_D8/FLEXBUS1_CSN_M5/VO_LCDC_D5/RM1_IO8/GPIO3_B0_D	119	I2C2_SCL_RM/RM3_IO5/GPIO4_A5_D
56	FLEXBUS0_D9/FLEXBUS0_CSN_M5/VO_LCDC_D6/RM1_IO9/GPIO3_B1_D	120	I2C2_SDA_RM/RM3_IO6/GPIO4_A6_D
57	FLEXBUS0_CLK/FLEXBUS1_CSN_M4/VO_LCDC_D7/RM1_IO10/GPIO3_B2_D	121	PWM0_CH0_RM/RM3_IO7/GPIO4_A7_D
58	FLEXBUS1_CLK/FLEXBUS0_CSN_M4/VO_LCDC_RDN_M0/RM1_IO11/GPIO3_B3_D	122	PWM0_CH1_RM/RM3_IO8/GPIO4_B0_D
59	FLEXBUS0_D10/FLEXBUS1_D15/FLEXBUS1_CSN_M3/RM1_IO12/GPIO3_B4_D	123	PWM0_CH2_RM/RM3_IO9/GPIO4_B1_D
60	FLEXBUS0_D11/FLEXBUS1_D14/FLEXBUS0_CSN_M3/RM1_IO13/GPIO3_B5_D	124	PWM0_CH3_RM/RM3_IO10/GPIO4_B2_D
61	FLEXBUS0_D12/FLEXBUS1_D13/FLEXBUS1_CSN_M2/RM1_IO14/GPIO3_B6_D	125	UART1_TX_RM/RM3_IO11/GPIO4_B3_D
62	FLEXBUS0_D13/FLEXBUS1_D12/FLEXBUS0_CSN_M2/RM1_IO15/GPIO3_B7_D	126	UART1_RX_RM/RM3_IO12/GPIO4_B4_D
63	FLEXBUS0_D14/FLEXBUS1_D11/FLEXBUS1_CSN_M1/RM1_IO16/GPIO3_C0_D	127	UART1_CTSN_RM/RM3_IO13/GPIO4_B5_D
64	FLEXBUS0_D15/FLEXBUS1_D10/FLEXBUS0_CSN_M1/RM1_IO17/GPIO3_C1_D	128	UART1_RTSN_RM/RM3_IO14/GPIO4_B6_D
		EPAD	VSS

2.7 Power/Ground IO Description

Table 2-2 RK2118M Power/Ground IO Information

Group	Pin#	Descriptions
VSS	4, EPAD	Digital Ground

Group	Pin#	Descriptions
CORE_DVDD	14,16,52,54,76,93,108,112	Logic Power
DSP0_DVDD	3,5	DSP0 Power
PMU_DVDD0V9	31	PMU Power
PMUIO_VCC3V3	32	PMU IO Power
VCCIO1_VCC	96,97	VCCIO1 IO Power
VCCIO2_VCC	111	VCCIO2 IO Power
VCCIO3_VCC	53,75	VCCIO3 IO Power
VCCIO4_VCC	115	VCCIO4 IO Power
VCCIO5_VCC	15	VCCIO5 IO Power
SYS_PLL_AVDD0V9	42	PLL Power
SYS_PLL_AVDD1V8	39	PLL Power
USB2_OTG_AVDD1V8	77	USB OTG2.0 Power
USB2_OTG_AVDD3V3	80	USB OTG2.0 Power
TSADC_AVDD1V8	2	TSADC Analog Power
AVDD_1V8	85	SarADC/OTP Analog Power

2.8 Function IO Description

Table 2-3 RK2118M Function IO Description

Pin	Pin Name	Func0	Func1	Func2	Func3	Func4	Func5	Pad Type④	Def③	Pull	Drive Strength②	INT	Power Domain
40	OSC_XIN	OSC_XIN						I	I	N/A	N/A		PLL
41	OSC_XOUT	OSC_XOUT						O	O	N/A	N/A		
43	OSC_CLK_OUT/REF_CLK0_OUT/GPIO0_B3_D	GPIO0_B3	OSC_CLK_OUT	REF_CLK0_OUT				IO	I	down	Level1	✓	
25	NPOR	NPOR						I	I	N/A	N/A		PMUIO_VCC3V3
26	TSADC_CTRL/RM0_IO0/GPIO0_A0_Z	GPIO0_A0	TSADC_CTRL				RM0_IO0	IO	I	Z	Level2	✓	
27	AUPLL_CLK_IN/RM0_IO1/GPIO0_A1_D	GPIO0_A1	AUPLL_CLK_IN				RM0_IO1	IO	I	down	Level2	✓	
28	ETH_CLK_25M_OUT/RM0_IO2/GPIO0_A2_D	GPIO0_A2	ETH_CLK_25M_OUT				RM0_IO2	IO	I	down	Level2	✓	
29	REF_CLK1_OUT/DSP_AVS/RM0_IO3/GPIO0_A3_D	GPIO0_A3	REF_CLK1_OUT	DSP_AVS			RM0_IO3	IO	I	down	Level2	✓	
30	CLK_32K/RM0_IO4/GPIO0_A4_D	GPIO0_A4	CLK_32K				RM0_IO4	IO	I	down	Level2	✓	
33	PWR_CTRL0/RM0_IO5/GPIO0_A5_D	GPIO0_A5	PWR_CTRL0				RM0_IO5	IO	I	down	Level2	✓	
34	PWR_CTRL1/RM0_IO6/GPIO0_A6_U	GPIO0_A6	PWR_CTRL1				RM0_IO6	IO	I	up	Level2	✓	
35	PWR_CTRL2/RM0_IO7/GPIO0_A7_U	GPIO0_A7	PWR_CTRL2				RM0_IO7	IO	I	up	Level2	✓	
36	PWR_CTRL3/JTAG_MCU_SWO_M1/RM0_IO8/GPIO0_B0_D	GPIO0_B0	PWR_CTRL3	JTAG_MCU_SWO_M1			RM0_IO8	IO	I	down	Level2	✓	
37	UART0_TX/JTAG_MCU_TCK_M1/RM0_IO9/GPIO0_B1_U	GPIO0_B1	UART0_TX	JTAG_MCU_TCK_M1			RM0_IO9	IO	I	up	Level2	✓	
38	UART0_RX/JTAG_MCU_TMS_M1/RM0_IO10/GPIO0_B2_U	GPIO0_B2	UART0_RX	JTAG_MCU_TMS_M1			RM0_IO10	IO	I	up	Level2	✓	
86	EMMC_D5/FSPI_D5/SPI0_CLK_M1/GPIO1_A0_U	GPIO1_A0	EMMC_D5		SPI0_CLK_M1			IO	I	up	Level2	✓	VCCIO1_VCC
87	EMMC_D3/FSPI_D7/SPI0_CSN_M1/GPIO1_A1_U	GPIO1_A1	EMMC_D3	FSPI_D7	SPI0_CSN_M1			IO	I	up	Level2	✓	
88	EMMC_D4/FSPI_D6/SPI0_MOSI_M1/GPIO1_A2_U	GPIO1_A2	EMMC_D4	FSPI_D6	SPI0_MOSI_M1			IO	I	up	Level2	✓	
89	EMMC_D0/FSPI_D4/SPI0_MISO_M1/GPIO1_A3_U	GPIO1_A3	EMMC_D0	FSPI_D4	SPI0_MISO_M1			IO	I	up	Level2	✓	
90	EMMC_D1/FSPI_D3/GPIO1_A4_U	GPIO1_A4	EMMC_D1	FSPI_D3				IO	I	up	Level2	✓	
91	FSPI_CLK/GPIO1_A5_D	GPIO1_A5		FSPI_CLK				IO	I	down	Level3	✓	
92	EMMC_D2/FSPI_D0/GPIO1_A6_U	GPIO1_A6	EMMC_D2	FSPI_D0				IO	I	up	Level2	✓	
94	EMMC_D7/FSPI_D2/GPIO1_A7_U	GPIO1_A7	EMMC_D7	FSPI_D2				IO	I	up	Level2	✓	
95	EMMC_D6/FSPI_D1/GPIO1_B0_U	GPIO1_B0	EMMC_D6	FSPI_D1				IO	I	up	Level2	✓	
98	EMMC_CMD/FSPI_CSN/GPIO1_B1_U	GPIO1_B1	EMMC_CMD	FSPI_CSN				IO	I	up	Level2	✓	
99	FSPI_RSTN/GPIO1_B2_D	GPIO1_B2		FSPI_RSTN				IO	I	down	Level2	✓	
100	EMMC_CLK/FSPI_DQS/GPIO1_B3_D	GPIO1_B3	EMMC_CLK	FSPI_DQS				IO	I	down	Level3	✓	
101	ETH_RMII_CRSDV/SPI0_CLK_M0/RM2_IO0/GPIO2_A0_D	GPIO2_A0	ETH_RMII_CRSDV	SPI0_CLK_M0			RM2_IO0	IO	I	down	Level2	✓	VCCIO2_VCC
102	ETH_RMII_MDIO/SPI0_CSN_M0/RM2_IO1/GPIO2_A1_D	GPIO2_A1	ETH_RMII_MDIO	SPI0_CSN_M0			RM2_IO1	IO	I	down	Level2	✓	
103	ETH_RMII_MDC/SPI0_MOSI_M0/RM2_IO2/GPIO2_A2_D	GPIO2_A2	ETH_RMII_MDC	SPI0_MOSI_M0			RM2_IO2	IO	I	down	Level2	✓	
104	ETH_RMII_TXEN/SPI0_MISO_M0/RM2_IO3/GPIO2_A3_D	GPIO2_A3	ETH_RMII_TXEN	SPI0_MISO_M0			RM2_IO3	IO	I	down	Level2	✓	
105	ETH_RMII_TXD1/JTAG_DSP_TDO/RM2_IO4/GPIO2_A4_D	GPIO2_A4	ETH_RMII_TXD1	JTAG_DSP_TDO			RM2_IO4	IO	I	down	Level2	✓	
106	ETH_RMII_TXD0/JTAG_DSP_TCK/RM2_IO5/GPIO2_A5_D	GPIO2_A5	ETH_RMII_TXD0	JTAG_DSP_TCK			RM2_IO5	IO	I	down	Level2	✓	
107	ETH_RMII_CLK/JTAG_DSP_TMS/RM2_IO6/GPIO2_A6_D	GPIO2_A6	ETH_RMII_CLK	JTAG_DSP_TMS			RM2_IO6	IO	I	down	Level2	✓	
109	ETH_RMII_RXD1/JTAG_DSP_TDI/RM2_IO7/GPIO2_A7_D	GPIO2_A7	ETH_RMII_RXD1	JTAG_DSP_TDI			RM2_IO7	IO	I	down	Level2	✓	
110	ETH_RMII_RXD0/JTAG_DSP_TRSTN/RM2_IO8/GPIO2_B0_D	GPIO2_B0	ETH_RMII_RXD0	JTAG_DSP_TRSTN			RM2_IO8	IO	I	down	Level2	✓	VCCIO3_VCC
44	FLEXBUS0_D0/VO_LCDC_CSN/RM1_IO0/GPIO3_A0_D	GPIO3_A0	FLEXBUS0_D0			VO_LCDC_CSN	RM1_IO0	IO	I	down	Level2	✓	
45	FLEXBUS0_D1/VO_LCDC_RS/RM1_IO1/GPIO3_A1_D	GPIO3_A1	FLEXBUS0_D1			VO_LCDC_RS	RM1_IO1	IO	I	down	Level2	✓	
46	FLEXBUS0_D2/VO_LCDC_WRN/RM1_IO2/GPIO3_A2_D	GPIO3_A2	FLEXBUS0_D2			VO_LCDC_WRN	RM1_IO2	IO	I	down	Level2	✓	
47	FLEXBUS0_D3/VO_LCDC_D0/RM1_IO3/GPIO3_A3_D	GPIO3_A3	FLEXBUS0_D3			VO_LCDC_D0	RM1_IO3	IO	I	down	Level2	✓	
48	FLEXBUS0_D4/VO_LCDC_D1/RM1_IO4/GPIO3_A4_D	GPIO3_A4	FLEXBUS0_D4			VO_LCDC_D1	RM1_IO4	IO	I	down	Level2	✓	

Pin	Pin Name	Func0	Func1	Func2	Func3	Func4	Func5	Pad Type④	Def③	Pull	Drive Strength②	INT	Power Domain
49	FLEXBUS0_D5/VO_LCDC_D2/RM1_IO5/GPIO3_A5_D	GPIO3_A5	FLEXBUS0_D5			VO_LCDC_D2	RM1_IO5	IO	I	down	Level2	✓	VCCIO3_VCC
50	FLEXBUS0_D6/VO_LCDC_D3/RM1_IO6/GPIO3_A6_D	GPIO3_A6	FLEXBUS0_D6			VO_LCDC_D3	RM1_IO6	IO	I	down	Level2	✓	
51	FLEXBUS0_D7/VO_LCDC_D4/RM1_IO7/GPIO3_A7_D	GPIO3_A7	FLEXBUS0_D7			VO_LCDC_D4	RM1_IO7	IO	I	down	Level2	✓	
55	FLEXBUS0_D8/FLEXBUS1_CSN_M5/VO_LCDC_D5/RM1_IO8/GPIO3_B0_D	GPIO3_B0	FLEXBUS0_D8		FLEXBUS1_CSN_M5	VO_LCDC_D5	RM1_IO8	IO	I	down	Level2	✓	
56	FLEXBUS0_D9/FLEXBUS0_CSN_M5/VO_LCDC_D6/RM1_IO9/GPIO3_B1_D	GPIO3_B1	FLEXBUS0_D9		FLEXBUS0_CSN_M5	VO_LCDC_D6	RM1_IO9	IO	I	down	Level2	✓	
57	FLEXBUS0_CLK/FLEXBUS1_CSN_M4/VO_LCDC_D7/RM1_IO10/GPIO3_B2_D	GPIO3_B2	FLEXBUS0_CLK		FLEXBUS1_CSN_M4	VO_LCDC_D7	RM1_IO10	IO	I	down	Level2	✓	
58	FLEXBUS1_CLK/FLEXBUS0_CSN_M4/VO_LCDC_RDN_M0/RM1_IO11/GPIO3_B3_D	GPIO3_B3		FLEXBUS1_CLK	FLEXBUS0_CSN_M4	VO_LCDC_RDN_M0	RM1_IO11	IO	I	down	Level2	✓	
59	FLEXBUS0_D10/FLEXBUS1_D15/FLEXBUS1_CSN_M3/RM1_IO12/GPIO3_B4_D	GPIO3_B4	FLEXBUS0_D10	FLEXBUS1_D15	FLEXBUS1_CSN_M3		RM1_IO12	IO	I	down	Level2	✓	
60	FLEXBUS0_D11/FLEXBUS1_D14/FLEXBUS0_CSN_M3/RM1_IO13/GPIO3_B5_D	GPIO3_B5	FLEXBUS0_D11	FLEXBUS1_D14	FLEXBUS0_CSN_M3		RM1_IO13	IO	I	down	Level2	✓	
61	FLEXBUS0_D12/FLEXBUS1_D13/FLEXBUS1_CSN_M2/RM1_IO14/GPIO3_B6_D	GPIO3_B6	FLEXBUS0_D12	FLEXBUS1_D13	FLEXBUS1_CSN_M2		RM1_IO14	IO	I	down	Level2	✓	
62	FLEXBUS0_D13/FLEXBUS1_D12/FLEXBUS0_CSN_M2/RM1_IO15/GPIO3_B7_D	GPIO3_B7	FLEXBUS0_D13	FLEXBUS1_D12	FLEXBUS0_CSN_M2		RM1_IO15	IO	I	down	Level2	✓	
63	FLEXBUS0_D14/FLEXBUS1_D11/FLEXBUS1_CSN_M1/RM1_IO16/GPIO3_C0_D	GPIO3_C0	FLEXBUS0_D14	FLEXBUS1_D11	FLEXBUS1_CSN_M1		RM1_IO16	IO	I	down	Level2	✓	
64	FLEXBUS0_D15/FLEXBUS1_D10/FLEXBUS0_CSN_M1/RM1_IO17/GPIO3_C1_D	GPIO3_C1	FLEXBUS0_D15	FLEXBUS1_D10	FLEXBUS0_CSN_M1		RM1_IO17	IO	I	down	Level2	✓	
65	FLEXBUS1_D9/FLEXBUS1_CSN_M0/RM1_IO18/GPIO3_C2_D	GPIO3_C2		FLEXBUS1_D9	FLEXBUS1_CSN_M0		RM1_IO18	IO	I	down	Level2	✓	
66	FLEXBUS1_D8/FLEXBUS0_CSN_M0/RM1_IO19/GPIO3_C3_D	GPIO3_C3		FLEXBUS1_D8	FLEXBUS0_CSN_M0		RM1_IO19	IO	I	down	Level2	✓	
67	FLEXBUS1_D7/RM1_IO20/GPIO3_C4_D	GPIO3_C4		FLEXBUS1_D7			RM1_IO20	IO	I	down	Level2	✓	
68	FLEXBUS1_D6/RM1_IO21/GPIO3_C5_D	GPIO3_C5		FLEXBUS1_D6			RM1_IO21	IO	I	down	Level2	✓	
69	SDMMC_D1/FLEXBUS1_D5/TEST_CLK_OUT/JTAG_MCU_SWO_M0/RM1_IO22/GPIO3_C6_D	GPIO3_C6	SDMMC_D1	FLEXBUS1_D5	TEST_CLK_OUT	JTAG_MCU_SWO_M0	RM1_IO22	IO	I	down	Level2	✓	
70	SDMMC_D0/FLEXBUS1_D4/RM1_IO23/GPIO3_C7_D	GPIO3_C7	SDMMC_D0	FLEXBUS1_D4			RM1_IO23	IO	I	down	Level2	✓	
71	SDMMC_CLK/FLEXBUS1_D3/RM1_IO24/GPIO3_D0_D	GPIO3_D0	SDMMC_CLK	FLEXBUS1_D3			RM1_IO24	IO	I	down	Level3	✓	
72	SDMMC_CMD/FLEXBUS1_D2/RM1_IO25/GPIO3_D1_D	GPIO3_D1	SDMMC_CMD	FLEXBUS1_D2			RM1_IO25	IO	I	down	Level2	✓	
73	SDMMC_D3/FLEXBUS1_D1/JTAG_MCU_TMS_M0/RM1_IO26/GPIO3_D2_D	GPIO3_D2	SDMMC_D3	FLEXBUS1_D1		JTAG_MCU_TMS_M0	RM1_IO26	IO	I	down	Level2	✓	
74	SDMMC_D2/FLEXBUS1_D0/JTAG_MCU_TCK_M0/RM1_IO27/GPIO3_D3_D	GPIO3_D3	SDMMC_D2	FLEXBUS1_D0		JTAG_MCU_TCK_M0	RM1_IO27	IO	I	down	Level2	✓	
113	VO_LCDC_RDN_M1/RM3_IO0/GPIO4_A0_D	GPIO4_A0	VO_LCDC_RDN_M1				RM3_IO0	IO	I	down	Level2	✓	VCCIO4_VCC
114	I2C0_SCL_RM/ETH_PPSCCLK_RM/RM3_IO1/GPIO4_A1_D	GPIO4_A1	I2C0_SCL_RM	ETH_PPSCCLK_RM			RM3_IO1	IO	I	down	Level2	✓	
116	I2C0_SDA_RM/ETH_PPSTRIG_RM/RM3_IO2/GPIO4_A2_D	GPIO4_A2	I2C0_SDA_RM	ETH_PPSTRIG_RM			RM3_IO2	IO	I	down	Level2	✓	
117	I2C1_SCL_RM/RM3_IO3/GPIO4_A3_D	GPIO4_A3	I2C1_SCL_RM				RM3_IO3	IO	I	down	Level2	✓	
118	I2C1_SDA_RM/RM3_IO4/GPIO4_A4_D	GPIO4_A4	I2C1_SDA_RM				RM3_IO4	IO	I	down	Level2	✓	
119	I2C2_SCL_RM/RM3_IO5/GPIO4_A5_D	GPIO4_A5	I2C2_SCL_RM				RM3_IO5	IO	I	down	Level2	✓	
120	I2C2_SDA_RM/RM3_IO6/GPIO4_A6_D	GPIO4_A6	I2C2_SDA_RM				RM3_IO6	IO	I	down	Level2	✓	
121	PWM0_CH0_RM/RM3_IO7/GPIO4_A7_D	GPIO4_A7	PWM0_CH0_RM				RM3_IO7	IO	I	down	Level2	✓	
122	PWM0_CH1_RM/RM3_IO8/GPIO4_B0_D	GPIO4_B0	PWM0_CH1_RM				RM3_IO8	IO	I	down	Level2	✓	
123	PWM0_CH2_RM/RM3_IO9/GPIO4_B1_D	GPIO4_B1	PWM0_CH2_RM				RM3_IO9	IO	I	down	Level2	✓	
124	PWM0_CH3_RM/RM3_IO10/GPIO4_B2_D	GPIO4_B2	PWM0_CH3_RM				RM3_IO10	IO	I	down	Level2	✓	
125	UART1_TX_RM/RM3_IO11/GPIO4_B3_D	GPIO4_B3	UART1_TX_RM				RM3_IO11	IO	I	down	Level2	✓	
126	UART1_RX_RM/RM3_IO12/GPIO4_B4_D	GPIO4_B4	UART1_RX_RM				RM3_IO12	IO	I	down	Level2	✓	VCCIO5_VCC
127	UART1_CTSN_RM/RM3_IO13/GPIO4_B5_D	GPIO4_B5	UART1_CTSN_RM				RM3_IO13	IO	I	down	Level2	✓	
128	UART1_RTSN_RM/RM3_IO14/GPIO4_B6_D	GPIO4_B6	UART1_RTSN_RM				RM3_IO14	IO	I	down	Level2	✓	
1	RM3_IO15/GPIO4_B7_D	GPIO4_B7					RM3_IO15	IO	I	down	Level2	✓	
6	UART2_TX_RM/RM4_IO0/GPIO4_C0_D	GPIO4_C0	UART2_TX_RM				RM4_IO0	IO	I	down	Level2	✓	
7	UART2_RX_RM/RM4_IO1/GPIO4_C1_D	GPIO4_C1	UART2_RX_RM				RM4_IO1	IO	I	down	Level2	✓	
8	UART2_CTSN_RM/RM4_IO2/GPIO4_C2_D	GPIO4_C2	UART2_CTSN_RM				RM4_IO2	IO	I	down	Level2	✓	
9	UART2_RTSN_RM/RM4_IO3/GPIO4_C3_D	GPIO4_C3	UART2_RTSN_RM				RM4_IO3	IO	I	down	Level2	✓	
10	PWM1_CH0_RM/RM4_IO4/GPIO4_C4_D	GPIO4_C4	PWM1_CH0_RM				RM4_IO4	IO	I	down	Level2	✓	VCCIO5_VCC
11	PWM1_CH1_RM/RM4_IO5/GPIO4_C5_D	GPIO4_C5	PWM1_CH1_RM				RM4_IO5	IO	I	down	Level2	✓	
12	PWM1_CH2_RM/RM4_IO6/GPIO4_C6_D	GPIO4_C6	PWM1_CH2_RM				RM4_IO6	IO	I	down	Level2	✓	

Pin	Pin Name	Func0	Func1	Func2	Func3	Func4	Func5	Pad Type①	Def③	Pull	Drive Strength②	INT	Power Domain
13	PWM1_CH3_RM/TOUCH_KEY_DRIVE_RM/RM4_IO7/GPIO4_C7_D	GPIO4_C7	PWM1_CH3_RM		TOUCH_KEY_DRIVE_RM		RM4_IO7	IO	I	down	Level2	✓	
17	UART3_TX_RM/TOUCH_KEY_IN0_RM/RM4_IO8/GPIO4_D0_D	GPIO4_D0	UART3_TX_RM		TOUCH_KEY_IN0_RM		RM4_IO8	IO	I	down	Level2	✓	
18	UART3_RX_RM/TOUCH_KEY_IN1_RM/RM4_IO9/GPIO4_D1_D	GPIO4_D1	UART3_RX_RM		TOUCH_KEY_IN1_RM		RM4_IO9	IO	I	down	Level2	✓	
19	I2C3_SCL_RM/UART3_CTSN_RM/TOUCH_KEY_IN2_RM/RM4_IO10/GPIO4_D2_D	GPIO4_D2	I2C3_SCL_RM	UART3_CTSN_RM	TOUCH_KEY_IN2_RM		RM4_IO10	IO	I	down	Level2	✓	
20	I2C3_SDA_RM/UART3_RTSN_RM/TOUCH_KEY_IN3_RM/RM4_IO11/GPIO4_D3_D	GPIO4_D3	I2C3_SDA_RM	UART3_RTSN_RM	TOUCH_KEY_IN3_RM		RM4_IO11	IO	I	down	Level2	✓	
21	I2C4_SCL_RM/TOUCH_KEY_IN4_RM/RM4_IO12/GPIO4_D4_D	GPIO4_D4	I2C4_SCL_RM		TOUCH_KEY_IN4_RM		RM4_IO12	IO	I	down	Level2	✓	
22	I2C4_SDA_RM/TOUCH_KEY_IN5_RM/RM4_IO13/GPIO4_D5_D	GPIO4_D5	I2C4_SDA_RM		TOUCH_KEY_IN5_RM		RM4_IO13	IO	I	down	Level2	✓	
23	I2C5_SCL_RM/TOUCH_KEY_IN6_RM/RM4_IO14/GPIO4_D6_D	GPIO4_D6	I2C5_SCL_RM		TOUCH_KEY_IN6_RM		RM4_IO14	IO	I	down	Level2	✓	
24	I2C5_SDA_RM/TOUCH_KEY_IN7_RM/RM4_IO15/GPIO4_D7_D	GPIO4_D7	I2C5_SDA_RM		TOUCH_KEY_IN7_RM		RM4_IO15	IO	I	down	Level2	✓	AVDD_1V8
81	SARADC_IN0_BOOT/GPIO2_B1_Z	GPIO2_B1	SARADC_IN0_BOOT					IO	I	z	Level1	✓	
82	SARADC_IN1/GPIO2_B2_Z	GPIO2_B2	SARADC_IN1					IO	I	z	Level1	✓	
83	SARADC_IN2/GPIO2_B3_Z	GPIO2_B3	SARADC_IN2					IO	I	z	Level1	✓	
84	SARADC_IN3/GPIO2_B4_Z	GPIO2_B4	SARADC_IN3					IO	I	z	Level1	✓	
78	USB2_OTG_DM	USB_DP						A					USB
79	USB2_OTG_DP	USB_DM						A					

Notes:

①: Pad types: I = input, O = output, I/O = input/output (bidirectional)

AP = Analog Power, AG = Analog Ground

DP = Digital Power, DG = Digital Ground

A = Analog

②: Output Drive Unit is mA, only Digital IO has drive value;

③: Reset state: I = input, O = output;

2.9 IO Pin Name Description

This sub-chapter will focus on the detailed function description of every pins based on different interface.

Table 2-4 IO Function Description List

Interface	Pin Name	Direction	Description
Misc	OSC_XIN	I	Clock input of crystal XO
	OSC_XOUT	O	Clock output of crystal XO
	NPOR	I	Chip hardware reset input
	OSC_CLK_OUT	O	OSC Clock Output for external function module
	REF_CLK0_OUT	O	REF Clock Output for external function module
	REF_CLK1_OUT	O	REF Clock Output for external function module
	ETH_CLK_25M_OUT	O	REF Clock Output for external function module
	AUPLL_CLK_IN	I	REF Clock Input for internal PLL
	TEST_CLK_OUT	O	Chip internal clock output for measurement
	PWR_CTRL0	O	Chip low power mode output indication signal
	PWR_CTRL1	O	Chip low power mode output indication signal
	PWR_CTRL2	O	Chip low power mode output indication signal
	PWR_CTRL3	O	Chip low power mode output indication signal
	TSADC_CTRL	O	Chip high temperature output indication signal
	CLK_32K	I/O	32K clock If configured as input, clock is provided from external circuit; If configured as output, clock is provided from internal circuit of chip;

Interface	Pin Name	Direction	Description
SWJ-DP	JTAG_MCU_TCK_Mi (i=0~1)	I	SWD interface clock input for MCU
	JTAG_MCU_TMS_Mi (i=0~1)	I/O	SWD interface data input/output for MCU
	JTAG_MCU_SWO_Mi (i=0~1)	O	Serial wire output for trace debug

Interface	Pin Name	Direction	Description
JTAG-DP	JTAG_DSP_TCK	I	JTAG interface for DSP
	JTAG_DSP_TMS	I	
	JTAG_DSP_TDI	I	
	JTAG_DSP_TDO	O	
	JTAG_DSP_TRSTN	I	

Interface	Pin Name	Direction	Description
	SDMMC_CLK	O	sdmmc card clock

Interface	Pin Name	Direction	Description
SD/MMC/S DIO Host Controller	SDMMC_CMD	I/O	sdmmc card command output and response input
	SDMMC_D[i] (i=0~3)	I/O	sdmmc card data input and output

Interface	Pin Name	Direction	Description
eMMC Interface	EMMC_CLK	O	emmc card clock
	EMMC_CMD	I/O	emmc card command output and response input
	EMMC_D[i] (i=0~7)	I/O	emmc card data input and output

Interface	Pin Name	Direction	Description
FSPI Controller	FSPI_CLK	O	fspi serial clock
	FSPI_CSN	O	fspi chip select signal, low active
	FSPI_Di(i=0~7)	I/O	fspi serial data input/output signal
	FSPI_DQS	I/O	fspi dqs input/output signal
	FSPI_RSTN	O	fspi reset signal, low active

Interface	Pin Name	Direction	Description
MCU Display Interface	VO_LCDC_CSN	O	MCU interface CSN signal
	VO_LCDC_RS	O	MCU interface RS signal
	VO_LCDC_WRN	O	MCU interface WRN signal
	VO_LCDC_RDN_Mi (i=0~1)	I	MCU interface RDN signal
	VO_LCDC_Di(i=0~7)	O	MCU interface data input/output

Interface	Pin Name	Direction	Description
SAI0/SAI4 Controller	SAIi_SCLK(i=0,4)	I/O	I2S/PCM/TDM serial clock
	SAIi_LRCK(i=0,4)	I/O	I2S/PCM/TDM channel indication signal
	SAIi_SDO0(i=0,4)	O	I2S/PCM/TDM serial data output
	SAIi_SDO1(i=0,4)	O	I2S/PCM/TDM serial data output
	SAIi_SDO2(i=0,4)	O	I2S/PCM/TDM serial data output
	SAIi_SDO3(i=0,4)	O	I2S/PCM/TDM serial data output
	SAIi_SDI0(i=0,4)	I	I2S/PCM/TDM serial data input
	SAIi_SDI1(i=0,4)	I	I2S/PCM/TDM serial data input
	SAIi_SDI2(i=0,4)	I	I2S/PCM/TDM serial data input
	SAIi_SDI3(i=0,4)	I	I2S/PCM/TDM serial data input

Interface	Pin Name	Direction	Description
SAI1~3	SAIi_SCLK(i=1,2,3,5,6,7)	I/O	I2S/PCM/TDM serial clock
SAI5~7	SAIi_LRCK(i=1,2,3,5,6,7)	I/O	I2S/PCM/TDM channel indication signal

Interface	Pin Name	Direction	Description
Controller	SAI _i _SDO0(<i>i</i> =1,2,3,5,6,7)	O	I2S/PCM/TDM serial data output
	SAI _i _SDO1(<i>i</i> =1,2,3,5,6,7)	O	I2S/PCM/TDM serial data output
	SAI _i _SDIO(<i>i</i> =1,2,3,5,6,7)	I	I2S/PCM/TDM serial data input
	SAI _i _SDI1(<i>i</i> =1,2,3,5,6,7)	I	I2S/PCM/TDM serial data input

Interface	Pin Name	Direction	Description
PDM	PDM_CLK0	O	PDM sampling clock
	PDM_CLK1	O	PDM sampling clock
	PDM_SDI(<i>i</i> =0~3)	I	PDM data

Interface	Pin Name	Direction	Description
SPI0	SPI0_CLK_Mi(<i>i</i> =0~1)	I	SPI serial clock
	SPI0_CSN_Mi(<i>i</i> =0~1)	I	SPI chip select signal, low active
	SPI0_MOSI_Mi(<i>i</i> =0~1)	I	SPI serial data input
	SPI0_MISO_Mi(<i>i</i> =0~1)	O	SPI serial data output

Interface	Pin Name	Direction	Description
SPI1/SPI2	SPI _i _CLK(<i>i</i> =1~2)	I/O	SPI serial clock
	SPI _i _CSN0(<i>i</i> =1~2)	I/O	SPI chip select signal, low active
	SPI _i _CSN1(<i>i</i> =1~2)	O	SPI chip select signal, low active
	SPI _i _MISO(<i>i</i> =1~2)	I/O	SPI serial data input/output
	SPI _i _MOSI(<i>i</i> =1~2)	I/O	SPI serial data input/output

Interface	Pin Name	Direction	Description
PWM	PWM0_CHi_RM(<i>i</i> =0~3)	I/O	Pulse Width Modulation input and output
	PWM1_CHi_RM(<i>i</i> =0~3)	I/O	Pulse Width Modulation input and output

Interface	Pin Name	Direction	Description
I2C	I2Ci_SDA_RM(<i>i</i> =0,1,2,3,4,5)	I/O	I2C data
	I2Ci_SCL_RM(<i>i</i> =0,1,2,3,4,5)	I/O	I2C clock

Interface	Pin Name	Direction	Description
UART	UART0_RX	I	UART serial data input
	UART0_TX	O	UART serial data output
	UART _i _RX_RM (<i>i</i> =1,2,3)	I	UART serial data input
	UART _i _TX_RM (<i>i</i> =1,2,3)	O	UART serial data output
	UART _i _CTSN_RM (<i>i</i> =1,2,3)	I	UART clear to send modem status input
	UART _i _RTSN_RM (<i>i</i> =1,2,3)	O	UART modem control request to send output

Interface	Pin Name	Direction	Description
Touch Key	TOUCH_KEY_IN _i _RM(<i>i</i> =0~7)	I	Touch Key data input
	TOUCH_KEY_DRIVE_ RM	O	Touch Key drive clock output

Interface	Pin Name	Direction	Description
RMII	ETH_RMII_CLK	I/O	RMII REC_CLK output or external clock input
	ETH_RMII_MDC	O	RMII management interface clock
	ETH_RMII_MDIO	I/O	RMII management interface data
	ETH_RMII_TXD _i (<i>i</i> =0 ~1)	O	RMII TX data
	ETH_RMII_RXD _i (<i>i</i> =0 ~1)	I	RMII RX data
	ETH_RMII_TXEN	O	RMII TX data enable
	ETH_RMII_CRSDV	I	RMII RX indication signal

Interface	Pin Name	Direction	Description
FLEXBUS	FLEXBUS0_CLK	O	FLEXBUS0 clock output
	FLEXBUS0_D _i (<i>i</i> =0~1 5)	I/O	FLEXBUS0 data input/output
	FLEXBUS1_CLK	I/O	FLEXBUS1 clock input/output DVP mode, acted as VICAP_CLK input
	FLEXBUS1_D _i (<i>i</i> =0~1 5)	I	FLEXBUS0 data input DVP mode, FLEXBUS1_D6 and FLEXBUS1_D7 acted as VICAP_VSYNC and VICAP_HREF input signal separately. FLEXBUS1_D8~ FLEXBUS1_D16 acted as VICAP_DATA0~ VICAP_DATA7 input signal.
	FLEXBUS0_CSN_M _i (<i>i</i> =0~5)	O	FLEXBUS0 chip selection output
	FLEXBUS1_CSN_M _i (<i>i</i> =0~5)	O	FLEXBUS1 chip selection output

Interface	Pin Name	Direction	Description
Rockchip matrix IO	RM0_IO <i>i</i> (<i>i</i> =0~10)	I/O	IO matrix0
	RM1_IO <i>i</i> (<i>i</i> =0~27)	I/O	IO matrix1
	RM2_IO <i>i</i> (<i>i</i> =0~8)	I/O	IO matrix2
	RM3_IO <i>i</i> (<i>i</i> =0~15)	I/O	IO matrix3
	RM4_IO <i>i</i> (<i>i</i> =0~15)	I/O	IO matrix4

Interface	Pin Name	Direction	Description
USB 2.0	USB2_OTG_DP	I/O	USB 2.0 Data signal DP
	USB2_OTG_DM	I/O	USB 2.0 Data signal DM

2.10 Rockchip Matrix IO Function List

RK2118M support five Rockchip Matrix IO (RM_IO) which are designed to let numerous functional signals share limited pin interfaces. Within the same matrix, any function signal can be mapped to any pin interface by software configurable.

- RM0_IO support 20 function signals map to 11 pin interfaces (GPIO0_A0~GPIO0_B2)
- RM1_IO support 40 function signals map to 28 pin interfaces (GPIO3_A0~GPIO3_D3)
- RM2_IO support 16 function signals map to 9 pin interfaces (GPIO2_A0~GPIO2_B0)
- RM3_IO support 41 function signals map to 16 pin interfaces (GPIO4_A0~GPIO4_B7)
- RM4_IO support 36 function signals map to 16 pin interfaces (GPIO4_C0~GPIO4_D7)

Table 2-5 RK2118M Rockchip Matrix IO Function List

Function Index	RM0_IO	RM1_IO	RM2_IO	RM3_IO	RM4_IO
1	I2C0_SCL	UART1_TX_RM1	UART1_TX_RM2	SPDIF_RX0	SPDIF_TX
2	I2C0_SDA	UART1_RX_RM1	UART1_RX_RM2	PDM_CLK0	SPDIF_RX1
3	I2C1_SCL	UART1_CTSN_RM1	UART1_CTSN_RM2	PDM_CLK1	MCLK4
4	I2C1_SDA	UART1_RTSN_RM1	UART1_RTSN_RM2	PDM_SDI0	MCLK5
5	PWM0_CH0	UART2_TX_RM1	UART2_TX_RM2	PDM_SDI1	MCLK6
6	PWM0_CH1	UART2_RX_RM1	UART2_RX_RM2	PDM_SDI2	MCLK7
7	PWM0_CH2	UART2_CTSN_RM1	UART2_CTSN_RM2	PDM_SDI3	SAI7_SCLK
8	PWM0_CH3	UART2_RTSN_RM1	UART2_RTSN_RM2	MCLK0	SAI7_LRCK
9	TOUCH_KEY_DRIVE_RM0	UART3_CTSN	I2C2_SCL_RM2	MCLK1	SAI7_SDI0
10	TOUCH_KEY_IN0_RM0	UART3_RX	I2C2_SDA_RM2	MCLK2	SAI7_SDI1
11	TOUCH_KEY_IN1_RM0	UART3_TX	I2C3_SCL_RM2	MCLK3	SAI7_SDO0
12	TOUCH_KEY_IN2_RM0	UART3_RTSN	I2C3_SDA_RM2	SAI3_SCLK	SAI7_SDO1
13	TOUCH_KEY_IN3_RM0	I2C2_SCL_RM1	I2C4_SCL_RM2	SAI3_LRCK	SAI6_SCLK
14	SPI1_CLK	I2C2_SDA_RM1	I2C4_SDA_RM2	SAI3_SDI0	SAI6_LRCK
15	SPI1_MOSI	I2C3_SCL_RM1	I2C5_SCL_RM2	SAI3_SDI1	SAI6_SDI0
16	SPI1_MISO	I2C3_SDA_RM1	I2C5_SDA_RM2	SAI3_SDO0	SAI6_SDI1
17	SPI1_CSN0	I2C4_SCL_RM1		SAI3_SDO1	SAI6_SDO0
18	SPI1_CSN1	I2C4_SDA_RM1		SAI2_SCLK	SAI6_SDO1

Function Index	RM0_IO	RM1_IO	RM2_IO	RM3_IO	RM4_IO
19	ETH_PPSCLK	I2C5_SCL_RM1		SAI2_LRCK	SAI5_SCLK
20	ETH_PPSTRIG	I2C5_SDA_RM1		SAI2_SDI0	SAI5_LRCK
21		CAN_TX		SAI2_SDI1	SAI5_SDI0
22		CAN_RX		SAI2_SDO0	SAI5_SDI1
23		PWM1_CH0		SAI2_SDO1	SAI5_SDO0
24		PWM1_CH1		SAI1_SCLK	SAI5_SDO1
25		PWM1_CH2		SAI1_LRCK	SAI4_SCLK
26		PWM1_CH3		SAI1_SDI0	SAI4_LRCK
27		TOUCH_KEY_DRIVE_RM1		SAI1_SDI1	SAI4_SDI0
28		TOUCH_KEY_IN0_RM1		SAI1_SDO0	SAI4_SDI1
29		TOUCH_KEY_IN1_RM1		SAI1_SDO1	SAI4_SDI2
30		TOUCH_KEY_IN2_RM1		SAI0_SCLK	SAI4_SDI3
31		TOUCH_KEY_IN3_RM1		SAI0_LRCK	SAI4_SDO0
32		TOUCH_KEY_IN4_RM1		SAI0_SDI0	SAI4_SDO1
33		TOUCH_KEY_IN5_RM1		SAI0_SDI1	SAI4_SDO2
34		TOUCH_KEY_IN6_RM1		SAI0_SDI2	SAI4_SDO3
35		TOUCH_KEY_IN7_RM1		SAI0_SDI3	SAI4_LRCKXN_0
36		SPI2_CLK		SAI0_SDO0	SAI4_LRCKXN_1
37		SPI2_MOSI		SAI0_SDO1	
38		SPI2_MISO		SAI0_SDO2	
39		SPI2_CSN0		SAI0_SDO3	
40		SPI2_CSN1		SAI0_LRCKXN_0	
41				SAI0_LRCKXN_1	

2.11 FLEXBUS Interface Typical Application Example

RK2118M FLEXBUS can be adapted to certain timing interface through software programming. In this section, we will list the pin mapping relationship for some typical application interfaces, such as ADC, DAC, DVP, QSPI LCD panel.

Table 2-6 RK2118M Pin Mapping between FLEXBUS and ADC

FLEXBUS Interface	Direction	ADC Application Interface
FLEXBUS1_D0	Input	ADC_D0
FLEXBUS1_D1	Input	ADC_D1
FLEXBUS1_D2	Input	ADC_D2
FLEXBUS1_D3	Input	ADC_D3
FLEXBUS1_D4	Input	ADC_D4
FLEXBUS1_D5	Input	ADC_D5
FLEXBUS1_D6	Input	ADC_D6

FLEXBUS Interface	Direction	ADC Application Interface
FLEXBUS1_D7	Input	ADC_D7
FLEXBUS1_D8	Input	ADC_D8
FLEXBUS1_D9	Input	ADC_D9
FLEXBUS1_D10	Input	ADC_D10
FLEXBUS1_D11	Input	ADC_D11
FLEXBUS1_D12	Input	ADC_D12
FLEXBUS1_D13	Input	ADC_D13
FLEXBUS1_D14	Input	ADC_D14
FLEXBUS1_D15	Input	ADC_D15
FLEXBUS1_CLK	Input Output	ADC_CLK_IN(from ADC) ADC_CLK_OUT(To ADC)

Table 2-7 RK2118M Pin Mapping between FLEXBUS and DAC

FLEXBUS Interface	Direction	DAC Application Interface
FLEXBUS0_D0	Output	DAC_D0
FLEXBUS0_D1	Output	DAC_D1
FLEXBUS0_D2	Output	DAC_D2
FLEXBUS0_D3	Output	DAC_D3
FLEXBUS0_D4	Output	DAC_D4
FLEXBUS0_D5	Output	DAC_D5
FLEXBUS0_D6	Output	DAC_D6
FLEXBUS0_D7	Output	DAC_D7
FLEXBUS0_D8	Output	DAC_D8
FLEXBUS0_D9	Output	DAC_D9
FLEXBUS0_D10	Output	DAC_D10
FLEXBUS0_D11	Output	DAC_D11
FLEXBUS0_D12	Output	DAC_D12
FLEXBUS0_D13	Output	DAC_D13
FLEXBUS0_D14	Output	DAC_D14
FLEXBUS0_D15	Output	DAC_D15
FLEXBUS0_CLK	Output	DAC_CLK
FLEXBUS0_CSN	Output	DAC_CS

Table 2-8 RK2118M Pin Mapping between FLEXBUS and DVP Camera

FLEXBUS Interface	Direction	DVP Application Interface
FLEXBUS1_D6	Input	VI_CIF_VSYNC
FLEXBUS1_D7	Input	VI_CIF_HREF
FLEXBUS1_D8	Input	VI_CIF_D0

FLEXBUS Interface	Direction	DVP Application Interface
FLEXBUS1_D9	Input	VI_CIF_D1
FLEXBUS1_D10	Input	VI_CIF_D2
FLEXBUS1_D11	Input	VI_CIF_D3
FLEXBUS1_D12	Input	VI_CIF_D4
FLEXBUS1_D13	Input	VI_CIF_D5
FLEXBUS1_D14	Input	VI_CIF_D6
FLEXBUS1_D15	Input	VI_CIF_D7
FLEXBUS1_CLK	Input	VI_CIF_CLK

Table 2-9 RK2118M Pin Mapping between FLEXBUS and QSPI LCD Panel

FLEXBUS Interface	Direction	QSPI LCD Application Interface
FLEXBUS0_D0	Inout	QSPI_D0
FLEXBUS0_D1	Inout	QSPI_D1
FLEXBUS0_D2	Inout	QSPI_D2
FLEXBUS0_D3	Inout	QSPI_D3
FLEXBUS0_CLK	Output	QSPI_CLK
FLEXBUS0_CS	Output	QSPI_CS

Chapter 3 Electrical Specification

3.1 Absolute Ratings

The below table provides the absolute ratings.

Absolute maximum or minimum ratings specify the values beyond which the device may be damaged permanently. Long-term exposure to absolute maximum ratings conditions may affect device reliability.

Table 3-1 Absolute Ratings

Parameters	Related Power Group	Min	Max	Unit
Supply voltage for DSP0	DSP0_DVDD	-0.3	1.05	V
Supply voltage for LOGIC	CORE_DVDD	-0.3	1.00	V
Supply voltage for PMU	PMU_DVDD0V9	-0.3	1.05	V
0.9V supply voltage	SYS_PLL_AVDD0V9	-0.3	1.05	V
1.8V supply voltage	SYS_PLL_AVDD1V8 USB2_OTG_AVDD1V8 TSADC_AVDD1V8 AVDD_1V8	-0.3	2.10	V
3.3V supply voltage	PMUIO_VCC3V3 USB2_OTG_AVDD3V3	-0.3	3.80	V
1.8V/3.3V supply voltage	VCCIO1_VCC VCCIO2_VCC VCCIO3_VCC VCCIO4_VCC VCCIO5_VCC	-0.3	3.80	V
Storage Temperature	Tstg	-40	125	°C
Max Conjunction Temperature	Tj		125	°C

3.2 Recommended Operating Condition

The following table describes the recommended operating conditions.

Table 3-2 Recommended Operating Conditions

Parameters	Symbol	Min	Typ	Max	Unit
Voltage for DSP0	DSP0_DVDD	0.81	0.90	1.00	V
Voltage for LOGIC	CORE_DVDD	0.81	0.90	0.95	V
Voltage for PMU	PMU_DVDD0V9	0.81	0.90	0.99	V
Voltage for PLL Analog (0.9V)	SYS_PLL_AVDD0V9	0.81	0.90	0.99	V
Voltage for PLL Analog (1.8V)	SYS_PLL_AVDD1V8	1.62	1.80	1.98	V
Voltage for GPIO (3.3V only)	PMUIO_VCC3V3	3.00	3.30	3.63	V
Voltage for GPIO (1.8V/3.3V)	VCCIO1_VCC VCCIO2_VCC VCCIO3_VCC VCCIO4_VCC VCCIO5_VCC	1.62 3.00	1.80 3.30	1.98 3.63	V

Parameters	Symbol	Min	Typ	Max	Unit
Voltage for SarADC/OTP Analog (1.8V)	AVDD_1V8	1.62	1.80	1.98	V
Voltage for TSADC Analog (1.8V)	TSADC_AVDD1V8	1.62	1.80	1.98	V
Voltage for USB Analog (1.8V)	USB2_OTG_AVDD1V8	1.62	1.80	1.98	V
Voltage for USB Analog (3.3V)	USB2_OTG_AVDD3V3	3.00	3.30	3.63	V
OSC input clock frequency	F _{osc}	N/A	24/ 24.576	N/A	MHz
Ambient Operating Temperature	T _A	-40	25	85	°C

3.3 DC Characteristics

Table 3-3 DC Characteristics

Parameters		Symbol	Min	Typ	Max	Unit
Digital GPIO @3.3V	Input Low Voltage	V _{il}	-0.3	NA	0.8	V
	Input High Voltage	V _{ih}	2.0	NA	VDDO+0.3	V
	Output Low Voltage	V _{ol}	-0.3	NA	0.4	V
	Output High Voltage	V _{oh}	2.4	NA	VDDO+0.3	V
	Pullup Resistor	R _{pu}	16	30	43	Kohm
	Pulldown Resistor	R _{pd}	16	30	43	Kohm
Digital GPIO @1.8V	Input Low Voltage	V _{il}	-0.3	NA	0.35*VDDO	V
	Input High Voltage	V _{ih}	0.65*VDDO	NA	VDDO+0.3	V
	Output Low Voltage	V _{ol}	-0.3	NA	0.4	V
	Output High Voltage	V _{oh}	1.4	NA	VDDO+0.3	V
	Pullup Resistor	R _{pu}	16	30	43	Kohm
	Pulldown Resistor	R _{pd}	16	30	43	Kohm

3.4 Electrical Characteristics for General IO

Table 3-4 Electrical Characteristics for Digital General IO

Parameters		Symbol	Test condition	Min	Typ	Max	Unit
Digital GPIO @3.3V	Input leakage current	I _i	V _{in} = 3.3V or 0V	NA	NA	15	uA
	Tri-state output leakage current	I _{oz}	V _{out} = 3.3V or 0V	NA	NA	15	uA
	High level input current	I _{ih}	V _{in} = 3.3V, pulldown disabled	NA	NA	15	uA
			V _{in} = 3.3V, pulldown enabled	NA	NA	250	uA
	Low level input current	I _{il}	V _{in} = 0V, pullup disabled	NA	NA	15	uA
			V _{in} = 0V, pullup enabled	NA	NA	250	uA
	Input leakage current	I _i	V _{in} = 1.8V or 0V	NA	NA	15	uA

Parameters		Symbol	Test condition	Min	Typ	Max	Unit
Digital GPIO @1.8V	Tri-state output leakage current	Ioz	Vout = 1.8V or 0V	NA	NA	15	uA
	High level input current	Iih	Vin = 1.8V, pulldown disabled	NA	NA	15	uA
			Vin = 1.8V, pulldown enabled	NA	NA	150	uA
	Low level input current	Iil	Vin = 0V, pullup disabled	NA	NA	15	uA
			Vin = 0V, pullup enabled	NA	NA	150	uA

3.5 Electrical Characteristics for PLL

Table 3-5 Electrical Characteristics for FRAC PLL

Parameters		Symbol	Test condition	Min	Typ	Max	Unit
	Input clock frequency(Frac)	F _{in}	Fin = FREF	10	NA	1200	MHz
	VCO operating range	F _{vco}	Fvco = FREF * FBDIV	950	NA	3800	MHz
	Output clock frequency	F _{out}	Fout = Fvco/POSTDIV	19	NA	3800	MHz
	Lock time	T _{lt}	FREF=24M,REFDIV=1	NA	250	500	Input clock cycles

Notes:

- ① REFDIV is the input divider value;
- ② FBDIV is the feedback divider value;
- ③ POSTDIV is the output divider value

3.6 Electrical Characteristics for USB2.0 Interface

Table 3-6 Electrical Characteristics for USB2.0 Interface

Parameters	Symbol	Test condition	Min	Typ	Max	Unit
Transmitter						
Output Resistance	ROUT	Classic mode (Vout = 0 or 3.3V)	40.5	45	49.5	ohms
		HS mode (Vout = 0 to 800mV)	40.5	45	49.5	ohms
Output Capacitance	COUT	seen from D+ or D-			3	pF
Output Common Mode Voltage	VM	Classic (LS/FS) mode	1.45	1.65	1.85	V
		HS mode	0.175	0.2	0.225	V
Differential output signal high	VOH	Classic (LS/FS); Io=0mA	2.97	3.3	3.63	V
		Classic (LS/FS); Io=6mA	2.2	2.7	NA	V
		HS mode; Io=0mA	360	400	440	mV
Differential output signal low	VOL	Classic (LS/FS); Io=0mA	-0.33	0	0.33	V
		Classic (LS/FS); Io=6mA	NA	0.3	0.8	V
		HS mode; Io=0mA	-40	0	40	mV

Parameters	Symbol	Test condition	Min	Typ	Max	Unit
Receiver						
Receiver sensitivity	RSENS	Classic mode	NA	+ -250	NA	mV
		HS mode	NA	+ -25	NA	mV
Receiver common mode	RCM	Classic mode	0.8	1.65	2.5	V
		HS mode (differential and squelch comparator)	0.1	0.2	0.3	V
		HS mode (disconnect comparator)	0.5	0.6	0.7	V
Input capacitance (seen at D+ or D-)			NA	NA	3	pF
Squelch threshold			100	NA	150	mV
Disconnect threshold			570	600	664	mV

3.7 Electrical Characteristics for SARADC

Table 3-7 Electrical Characteristics for SARADC

Parameters	Symbol	Test condition	Min	Typ	Max	Unit
Resolution			NA	10	NA	bit
Effective Number of Bit	ENOB		NA	9	NA	bit
Differential Non-Linearity	DNL		-1	NA	+1	LSB
Integral Non-Linearity	INL		-2	NA	+2	LSB
Reference voltage	VREFP		NA	1.8	NA	V
Input Capacitance	C _{IN}		NA	8	NA	pF
Sampling Rate	f _S		NA	NA	1	MS/s
Spurious Free Dynamic Range	SFDR	f _S =1MS/s f _{OUT} =1.17KHz	NA	61	NA	dB
Signal to Noise and Harmonic Ratio	SNDR		NA	56	NA	dB

3.8 Electrical Characteristics for TSADC

Table 3-8 Electrical Characteristics for TSADC

Parameters	Symbol	Test condition	Min	Typ	Max	Unit
Accuracy from -40°C to 125°C	T _{JACC}		NA	NA	±5	°C
Sensing Temperature Range	T _{RANGE}		-40	NA	125	°C
Resolution	T _{LSB}		NA	0.6	NA	°C

Chapter 4 Timing Specification

4.1 FSPI Interface

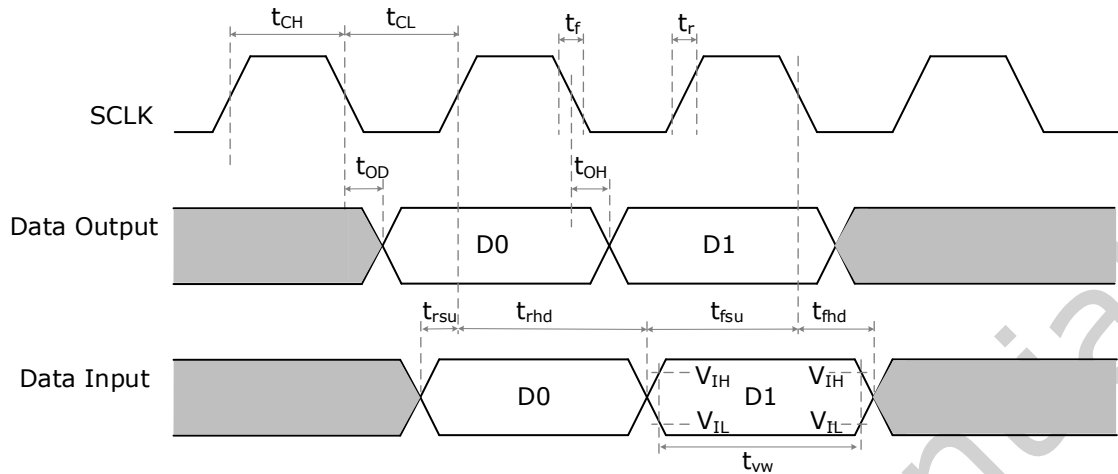


Fig.4-1 FSPI Interface Timing

Parameter		Min	Typ	Max	Unit
f_{SCLK}	FSPI Clock Frequency			133	MHz
t_{CH}	Clock High	$t_{CK} * 45\%$		$t_{CK} * 55\%$	ns
t_{CL}	Clock Low	$t_{CK} * 45\%$		$t_{CK} * 55\%$	ns
t_{OD}	Data output valid time	-2		2	ns
t_{OH}	Data output hold time	-2		2	ns
t_{rsu}^{*1}	Data input setup time for rise edge sampling	8.5			ns
t_{rhd}^{*1}	Data input hold time for rise edge sampling	0			ns
t_{fsu}^{*1}	Data input setup time for fall edge sampling	8.5			ns
t_{fhd}^{*1}	Data input hold time for fall edge sampling	0			ns
t_{vw}^{*2}	Data valid window	$0.5 * t_{CK}$			

1. When the FSPI frequency exceeds 50MHz, there is no need to pay attention to this indicator, as the setup and hold time on the SOC side are guaranteed by the internal software-configurable sampling delay-line compensation.
2. All frequencies must meet this specification.
3. Output timing valid for maximum external load $CL = 15pF$.

4.2 eMMC Interface

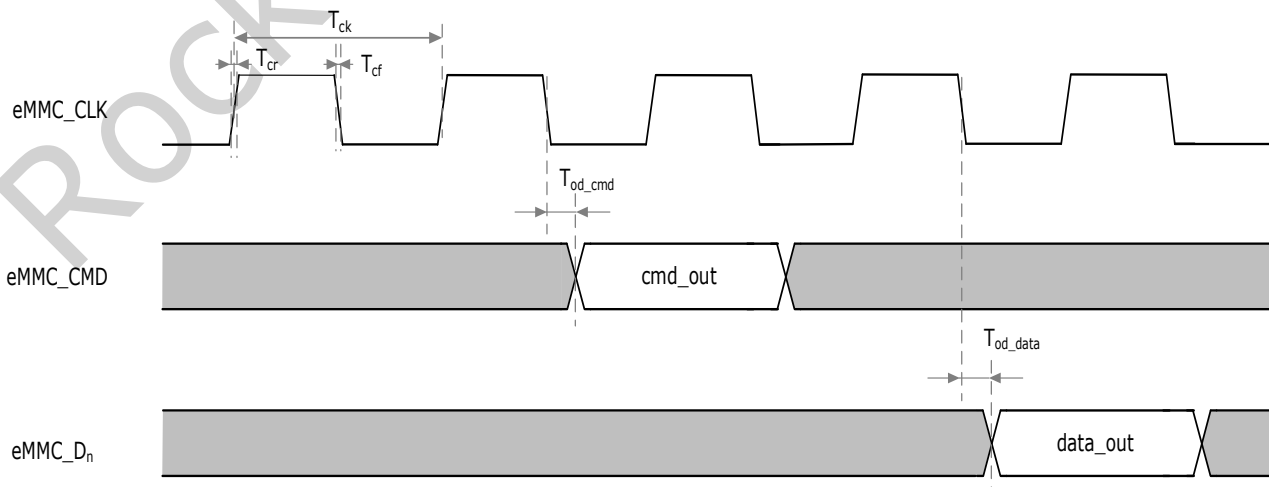


Fig.4-2 eMMC output mode timing

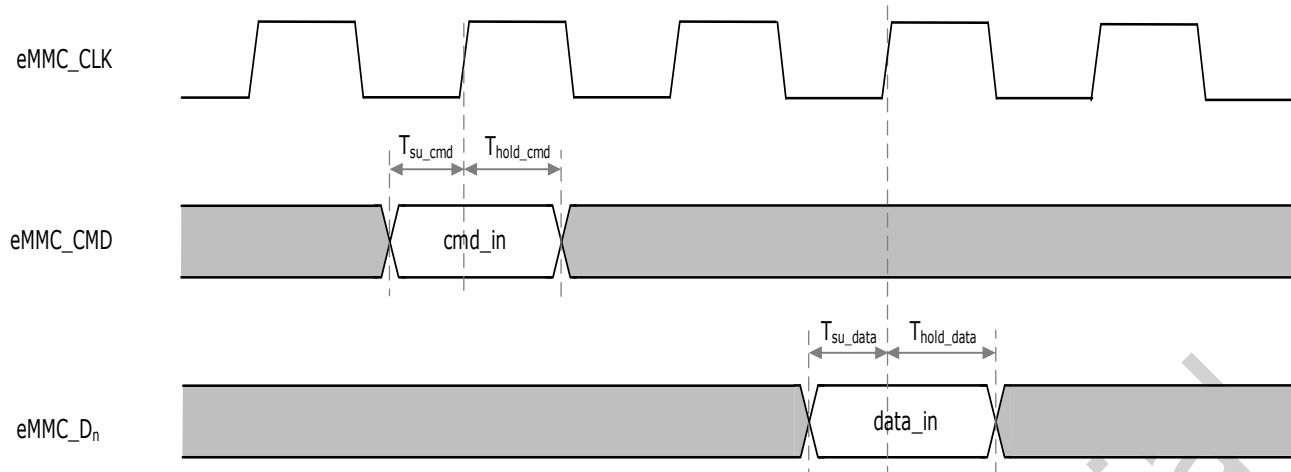


Fig.4-3 eMMC input mode timing

EMMC backward mode					
Parameter		Min.	Typ.	Max.	Unit
CMD Interface					
T_{su_cmd}	Command input setup time	9			ns
T_{hold_cmd}	Command input hold time	0			ns
T_{od_cmd}	Command output delay	-2		2	ns
DATA Interface					
T_{su_data}	Data input setup time	9			ns
T_{hold_data}	Data input hold time	0			ns
T_{od_data}	Data output delay time	-2		2	ns
Clock Interface					
T_{ck}	Clock cycle time	40			ns
EMMC high speed mode					
Parameter		Min.	Typ.	Max.	Unit
CMD Interface					
T_{su_cmd}	Command input setup time	9			ns
T_{hold_cmd}	Command input hold time	0			ns
T_{od_cmd}	Command output delay time	-2		2	ns
DATA Interface					
T_{su_data}	Data input setup time	9			ns
T_{hold_data}	Data input hold time	0			ns
T_{od_data}	Data output delay time	-2		2	ns
Clock Interface					
T_{ck}	Clock cycle time	20			ns
1.Output timing valid for maximum external load CL = 15pF.					

4.3 SDMMC Interface

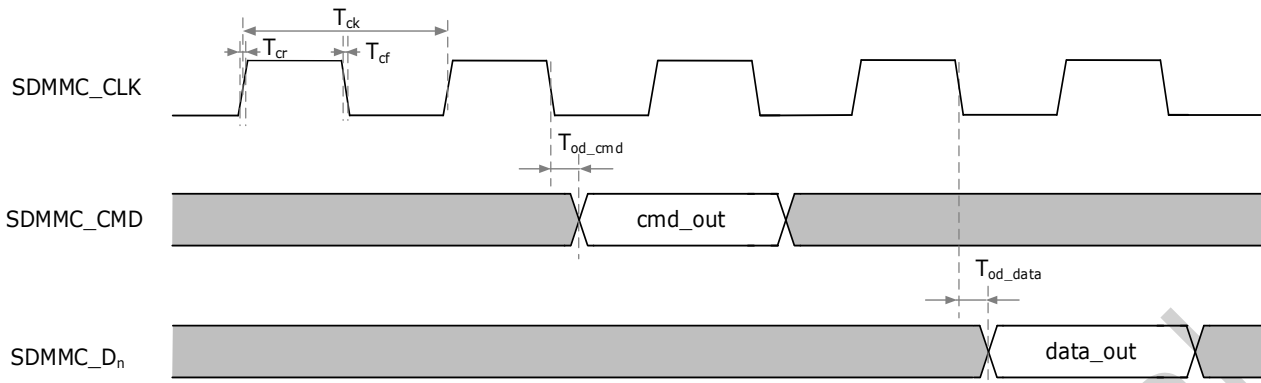


Fig.4-4 SDMMC output mode timing

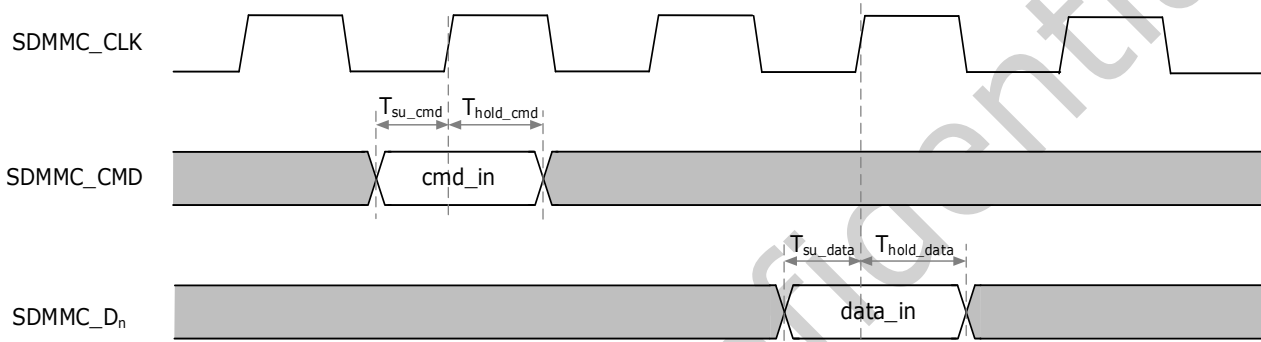


Fig.4-5 SDMMC input mode timing

Parameter		Min.	Typ.	Max.	Unit
CMD Interface					
T _{su_cmd}	Command input setup time	8			ns
T _{hold_cmd}	Command input hold time	0			ns
T _{od_cmd}	Command output delay	-2		2	ns
DATA Interface					
T _{su_data}	Data input setup time	8			ns
T _{hold_data}	Data input hold time	0			ns
T _{od_data}	Data output delay time	-2		2	ns
Clock Interface					
T _{ck}	Clock cycle time	20			ns
1.Output timing valid for maximum external load CL = 15pF.					

4.4 PDM Interface

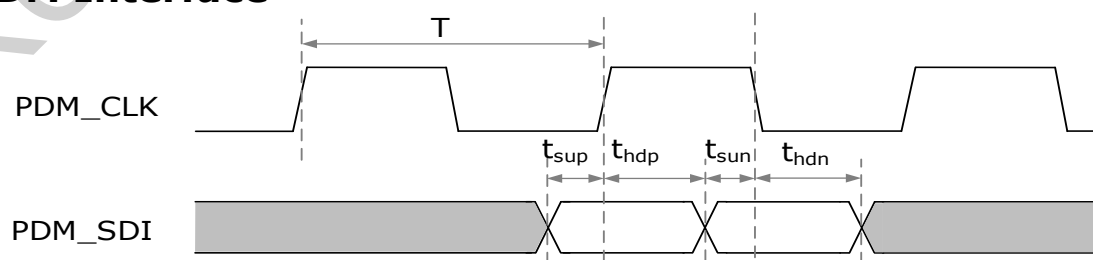


Fig.4-6 PDM interface timing

Parameter		Min.	Typ.	Max.	Unit
T	Frequency of PDM_CLK	1.024	4.096	6.144	MHz

T _{duty}	Duty cycle of PDM_CLK	45%	50%	55%	N/A
t _{sup}	Input SDI setup time to PDM_CLK rising edge	9.5			ns
t _{hdp}	Input SDI hold time to PDM_CLK rising edge	0			ns
t _{sun}	Input SDI setup time to PDM_CLK falling edge	9.5			ns
t _{hdn}	Input SDI hold time to PDM_CLK falling edge	0			ns

1.Output timing valid for maximum external load CL = 15pF.

4.5 SAI Interface

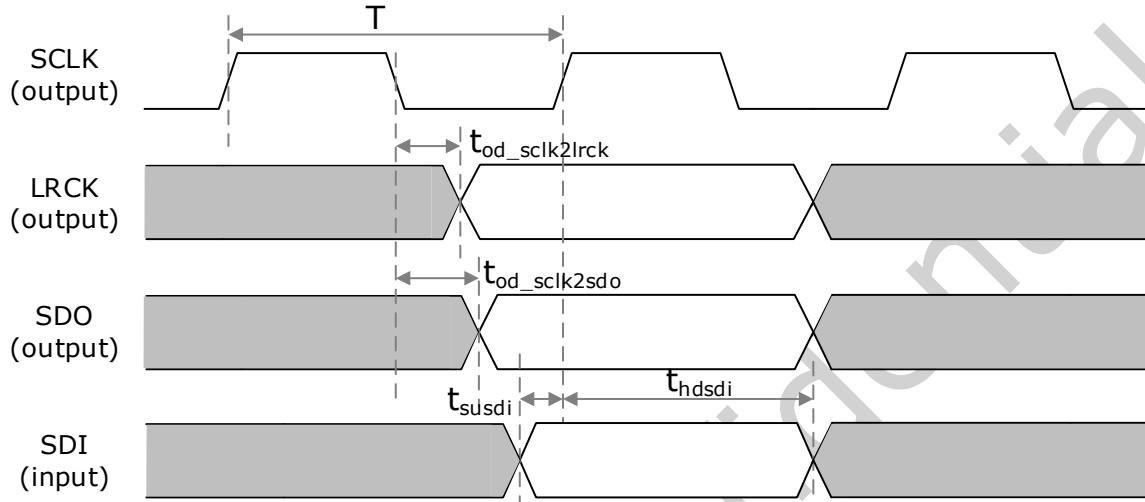


Fig.4-7 SAI interface master mode timing

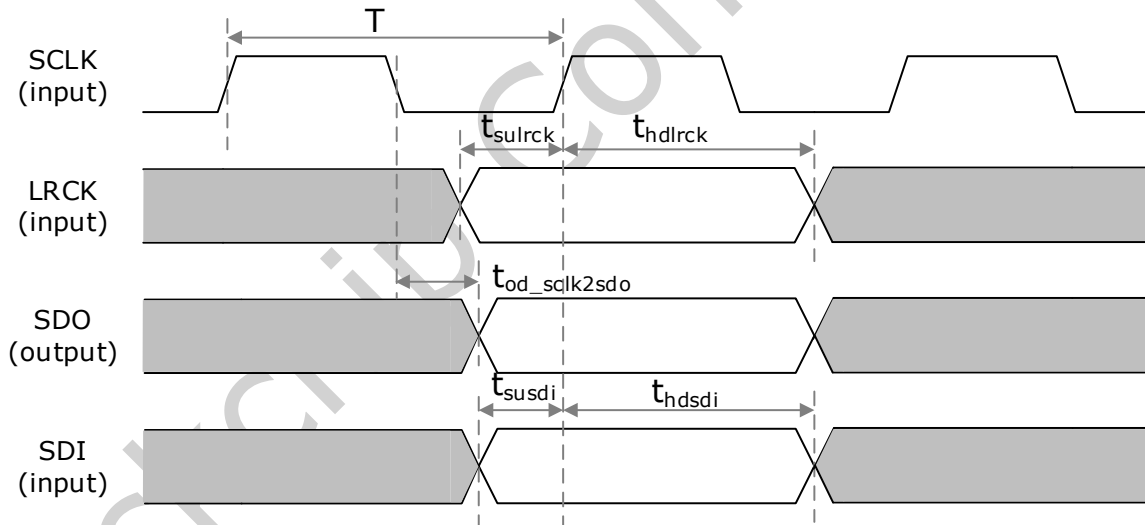


Fig.4-8 SAI interface Slave mode timing

Table 4-1 SAI interface master mode timing

Parameter		Min.	Typ.	Max.	Unit
Fsclk	Frequency of SCLK	0.256	12.288	98.304	MHz
Fsclk	Duty cycle of SCLK	45%	50%	55%	
LRCK	Duty cycle	45%	50%	55%	
t _{od_sclk2lrck}	LRCK delay time from SCLK falling edge	-1.5		1.5	ns
t _{od_sclk2sdo}	SDO propagation delay from SCLK falling edge	-1.5		1.5	ns
t _{susdi} ^{*1}	SDI setup time to SCLK rising edge	11			ns
t _{hdsdi}	SDI hold time from SCLK rising edge	0			ns

1.The SAI supports software-configurable sampling edges, so the minimum setup time on the SOC side can be calculated using the following formula: $t_{susdi} = (-sdi_samp_dly * T/2) + 11$.

2.Output timing valid for maximum external load CL = 15pF.

Table 4-2 SAI interface slave mode timing

Parameter		Min.	Typ.	Max.	Unit
Fsclk	Frequency of SCLK	0.256	12.288	98.304	MHz
Fsclk	Duty cycle of SCLK	45%	50%	55%	
LRCK	Duty cycle	45%	50%	55%	
t_{sulrck}	LRCK setup time to SCLK rising edge	1.5			ns
t_{hdlrck}	LRCK hold time from SCLK rising edge	1.5			ns
$t_{od_sclk2sdo}^{*1}$	SDO propagation delay from SCLK falling edge			13	ns
t_{susdi}	SDI setup time to SCLK rising edge	1.5			ns
t_{hdsdi}	SDI hold time from SCLK rising edge	1.5			ns

1. The SAI supports software-configurable phase adjustment relative to SCLK, the value of TOD can be calculated using the formula: $Tod = -(sdo_out_dly * T/2) + 13$.
2. Output timing valid for maximum external load $CL = 15pF$.

4.6 RMII Interface

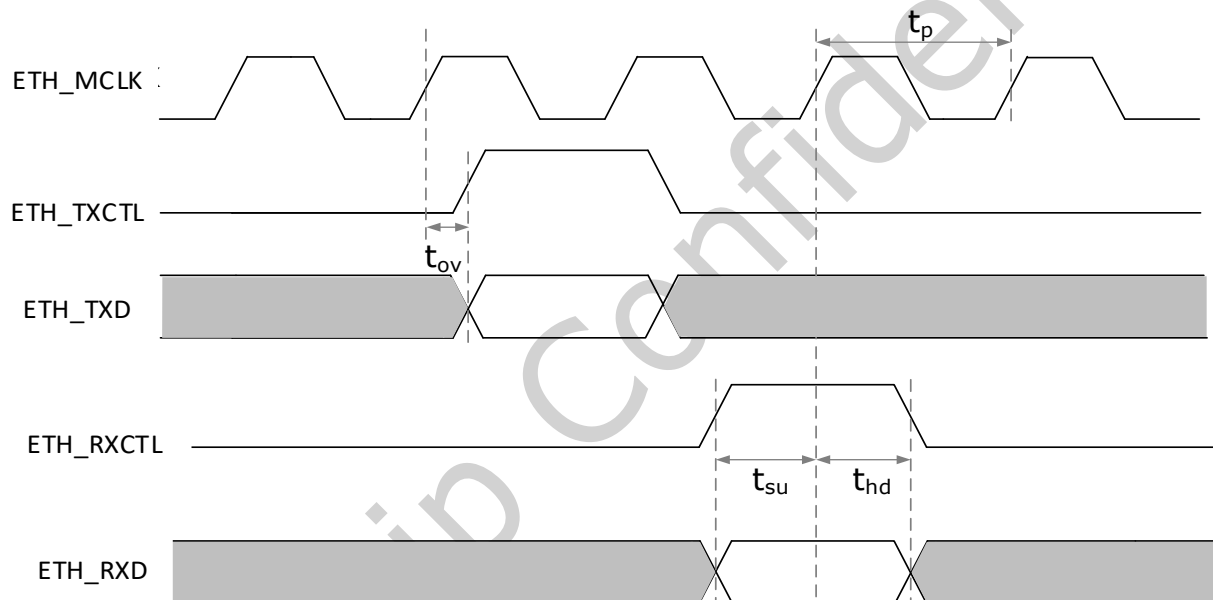


Fig.4-9 RMII interface timing

Parameter		Min.	Typ.	Max.	Unit
t_p	REF_CLK Period		20		ns
t_{suR}	RXD Setup Time	6			ns
t_{hdR}	RXD Hold Time	2			ns
t_{ov}	TXD Output Delay	3		10	ns
t_{suT}	TXD Setup Time to CLK	4			ns
t_{hdT}	TXD Hold Time to CLK	2			ns

1. Output timing valid for maximum external load $CL = 15pF$.

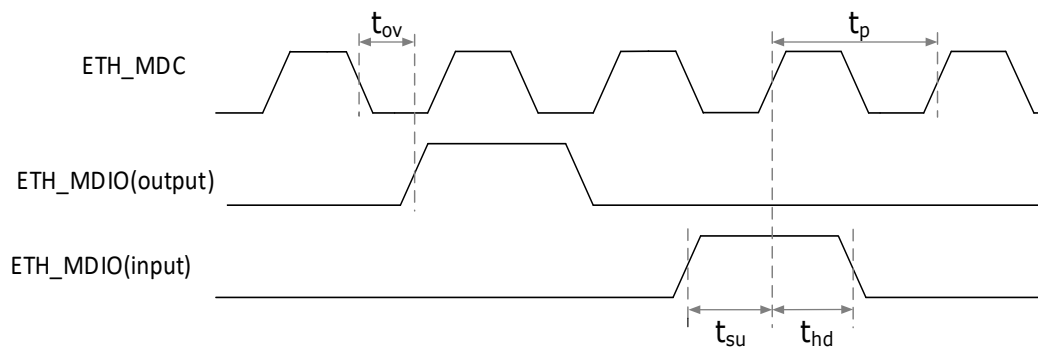


Fig.4-10 MDIO interface timing

Parameter		Min.	Typ.	Max.	Unit
t_p	MDC Period	400			ns
t_{su}	MDIO Setup Time(Read)	8			ns
t_{hd}	MDIO Hold Time(Read)	0			ns
t_{ov}	MDIO Output Delay(Write)	-1		3	ns

1.Output timing valid for maximum external load CL = 15pF.

4.7 SPI Interface

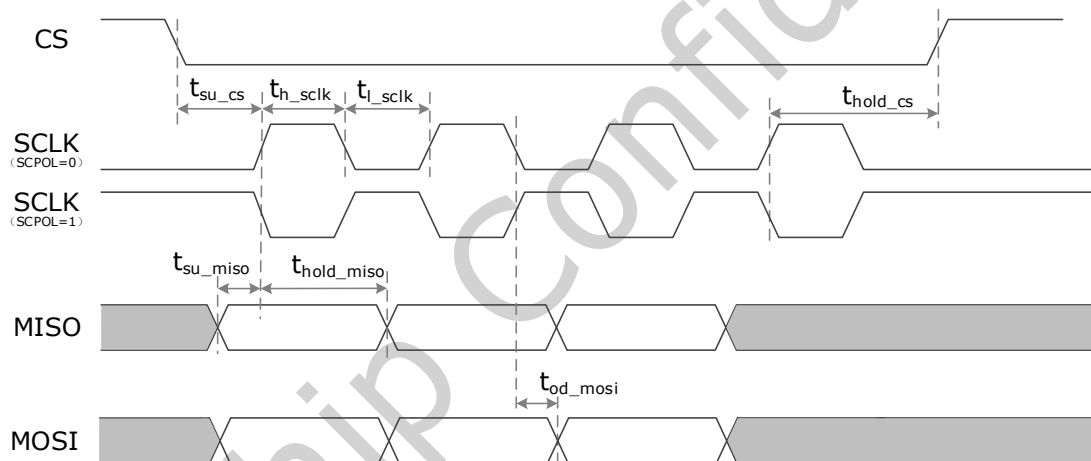


Fig.4-11 SPI interface master mode timing

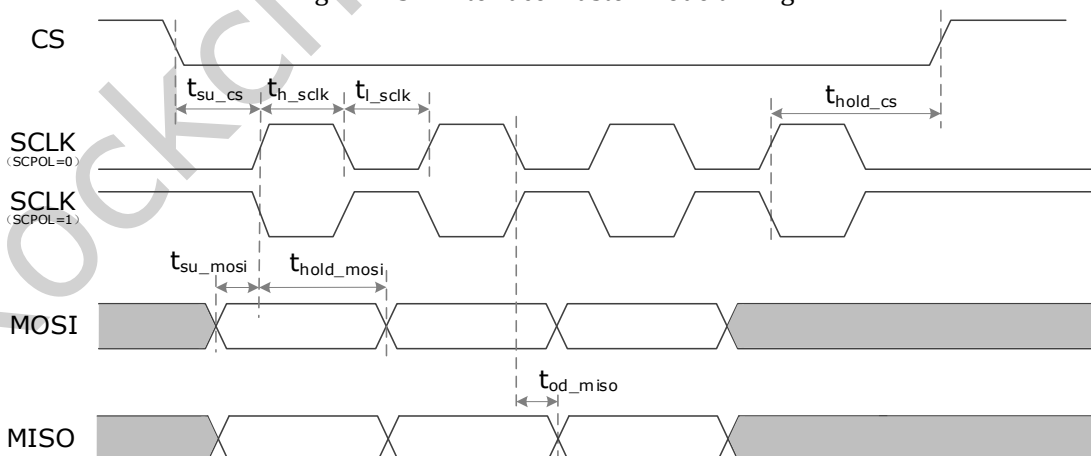


Fig.4-12 SPI interface slave mode timing

Table 4-3 SPI interface master mode timing

Parameter		Min.	Typ.	Max.	Unit
F_{sclk}	Frequency of SCLK			50	MHz
t_{h_sclk}	Clock high		10		ns
t_{l_sclk}	Clock low		10		ns

t_{su_cs}	cs active setup time	10.3			ns
t_{hold_cs}	cs active hold time	10.4			ns
$t_{su_miso}^{*1}$	Data input setup time	10.1			ns
$t_{hold_miso}^{*2}$	Date input hold time	2.4			ns
t_{od_mosi}	Data output delay time from SCLK	-1		3	ns

1.The SPI supports software-configurable sampling edges, so the minimum setup time on the SOC side can be calculated using the following formula: $t_{su_miso}=10.1-(rsd+1)*5$.

2.The SPI supports software-configurable sampling edges, so the minimum setup time on the SOC side can be calculated using the following formula: $t_{hold_miso}=(rsd+1)*5- 7.6$.

3.Output timing valid for maximum external load CL = 15pF.

Table 4-4 SPI interface slave mode timing

Parameter		Min.	Typ.	Max.	Unit
F_{sclk}	Frequency of SCLK			50	MHz
t_{h_sclk}	Clock high		10		ns
t_{l_sclk}	Clock low		10		ns
t_{su_cs}	cs active setup time	5			ns
t_{hold_cs}	cs active hold time	25			ns
t_{su_mosi}	Data input setup time	0.6			ns
t_{hold_mosi}	Date input hold time	1			ns
t_{od_miso}	Data output delay time from SCLK	2.5		9.7	ns

1.Output timing valid for maximum external load CL = 15pF

4.8 SPI2APB(SPI0) Interface

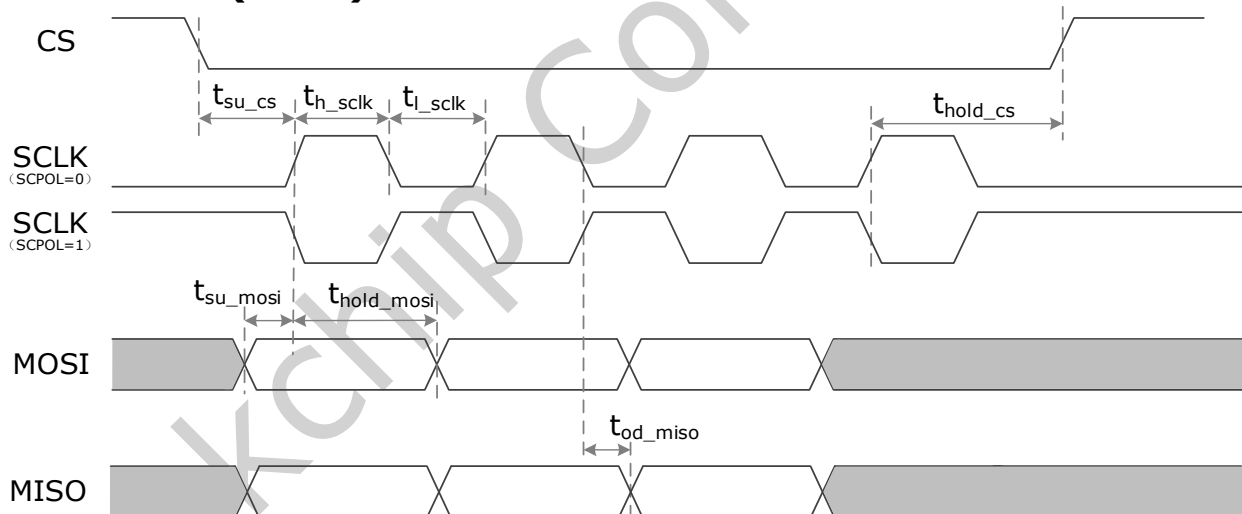


Fig.4-13 SPI2APB interface slave mode timing

Parameter		Min.	Typ.	Max.	Unit
F_{sclk}	Frequency of SCLK			50	MHz
t_{h_sclk}	Clock high		10		ns
t_{l_sclk}	Clock low		10		ns
t_{su_cs}	cs active setup time	0.5			ns
t_{hold_cs}	cs active hold time	0.5			ns
t_{su_mosi}	Data input setup time	0.6			ns
t_{hold_mosi}	Date input hold time	1			ns
t_{od_miso}	Data output delay time from SCLK	3		11	ns

1.Output timing valid for maximum external load CL = 15pF.

4.9 Flexbus interface

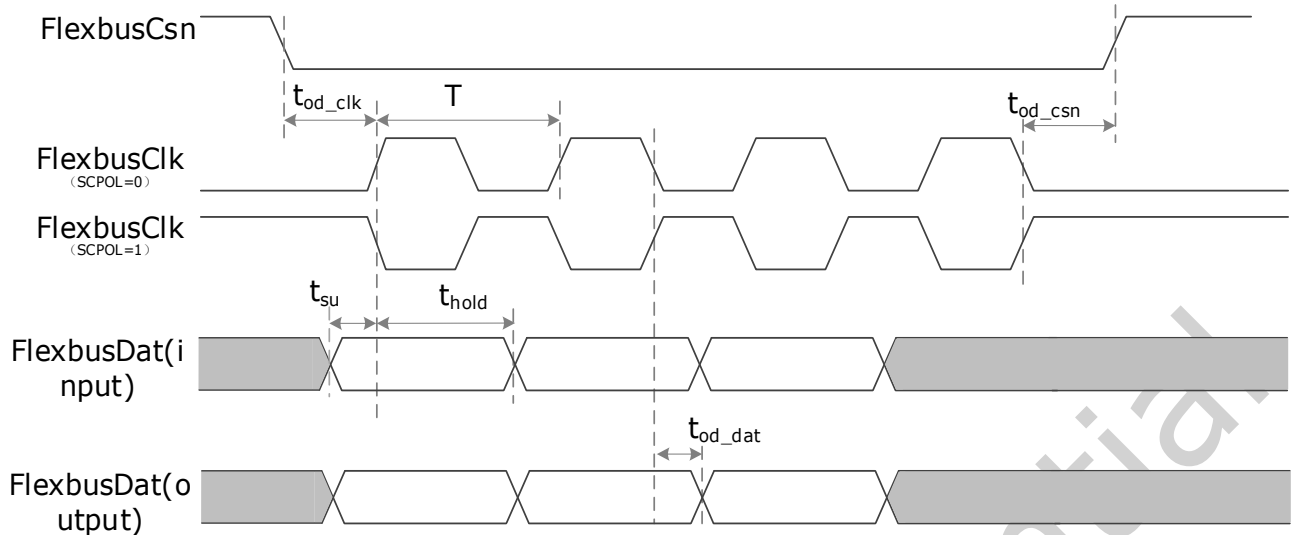


Fig.4-14 Flexbus interface master mode timing

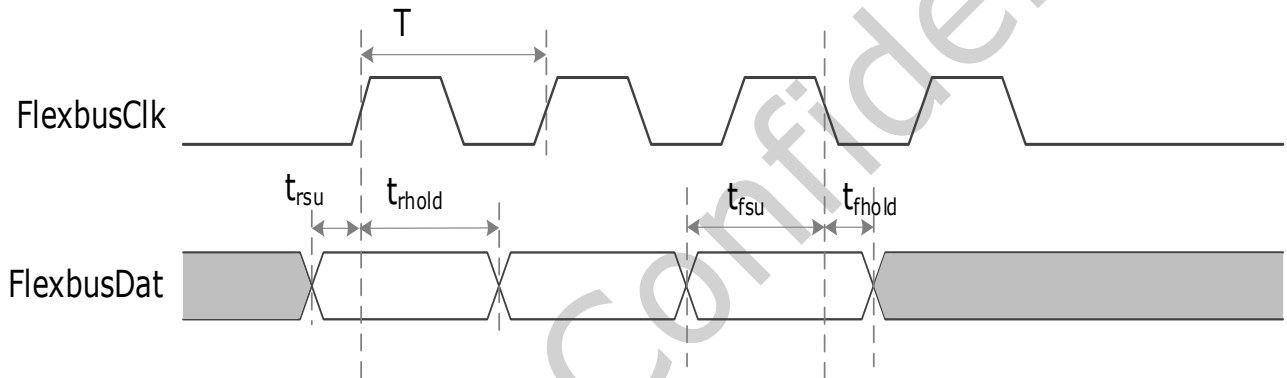


Fig.4-15 Flexbus interface slave mode timing

Table 4-5 Flexbus interface master mode timing

Parameter		Min.	Typ.	Max.	Unit
F _{clk}	Flexbus clock Frequency		100	100	MHz
t _{od_clk}	Flexbus0Csn active to Flexbus0Clk valid	4.3			ns
t _{od_csn}	Flexbus0Clk stop to Flexbus0Csn inactive	0			ns
t _{su}	Data input setup time	9.1-rxd_dly ^{*1} *tcycle ^{*2}			ns
t _{hold}	Data input hold time	rxd_dly ^{*1} *tcycle ^{*2} - 2.4 ^{*2}			ns
t _{od_dat}	Data output delay	-2		2	ns

1.The value of rxd_dly is configured by internal software, and it can be either 0 or 1.
2.tcycle=1/(2*F_{clk}).
3.Output timing valid for maximum external load CL = 15pF.

Table 4-6 Flexbus interface slave mode timing

Parameter		Min.	Typ.	Max.	Unit
F _{clk}	Flexbus clock Frequency			100	MHz
t _{rsu}	Data input setup time for rise edge sampling	0.8			ns
t _{rhold}	Data input hold time for rise edge sampling	0.4			ns
t _{fsu}	Data input setup time for fall edge sampling	0.8			ns

Parameter		Min.	Typ.	Max.	Unit
t_{hold}	Data input hold time for fall edge sampling	0.4			ns
1.Output timing valid for maximum external load CL = 15pF.					

Chapter 5 Thermal Management

5.1 Overview

For reliability and operability concerns, the absolute maximum junction temperature has to be below 125°C.

5.2 Package Thermal Characteristics

Table 5-1 provides the thermal resistance characteristics for the package used on the SoC. The resulting simulation data for reference only, please prevail in kind test.

Table 5-1 RK2118M Thermal Resistance Characteristics

Parameter	Symbol	Typical	Unit	Note
Junction-to-ambient thermal resistance	θ_{JA}	14.5	(°C/W)	(1)
Junction-to-board thermal resistance	θ_{JB}	5.5	(°C/W)	(2)
Junction-to-case thermal resistance	θ_{JC}	5.5	(°C/W)	(3)
Thermal characterization parameter	ψ_{JT}	0.5	(°C/W)	(4)

Note (1): The package-board system is placed in the natural convection (JEDEC JESD51-2 standard), and the 2S2P test-board is designed in accordance with JESD 51-7/JESD 51-9. The actual system design and environment may be different. (The PCB is 4 layers, 114.3 mm*76.2 mm)

Note (2): θ_{JB} is measured in the special environment (JEDEC JESD51-8 standard), and the printed circuit board used to mount the devices is specified in JESD51-7.

Note (3): The thermal resistance θ_{JC} is provided in compliance with the JEDEC JESD51-14.

Note (4): ψ_{JT} - The thermal characterization parameter to report the difference between junction temperature and the temperature at the top center of the outside surface of the component package, ψ_{JT} is measured in the test environment of θ_{JA} (JEDEC JESD51-2 standard).